

EXP LED Series

Class I, Division 1 & 2, Groups C and D. Class II, Division 1 & 2, Groups E, F and G, Class III



EXP6N & EXP12N
combination series

EXP6N & EXP12N
battery unit

Housing

- One-piece heavy gauge, corrosion resistant, copper-free cast aluminum
- Consists of a housing with provisions for up to two fixtures
- Spin-off gasketed cover prevents propagation of internally generated arcs
- Stainless steel vent/drain
- Lighting fixtures are heavy cast aluminum with Pyrex® lens
- Exit faceplate: heavy-duty 20 gauge steel, baked enamel grey finish
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons

Mounting

- Surface wall mount
- 3/4" NPT conduit entry on top and bottom of housing
- Single and double pendant mount heads include elbow swivel, conduit extension pipe (6" increments)

Electronics

- Pulse plus charger
- Low voltage disconnect
- Automatic brownout protection
- Battery lock-out
- Fused output circuit
- 120/277 60Hz

Lamp type

- Heads offer a choice of MR16 LED lamp wattages
- Exit sign uses a 3 watt LED lamp

Battery type

6V or 12V, Nickel-Cadmium battery

Approvals

- CSA-US (To UL 924 standards)
- Manufactured in accordance with UL844, UL1203
- Class I, Division 1 & 2, Groups C and D
- Class II, Division 1 & 2, Groups E, F and G
- Class III
- NEC, OSHA and NEMA compliant for above Classes and Groups
- Temperature Code T6

Warranty (subject to proper installation and maintenance)

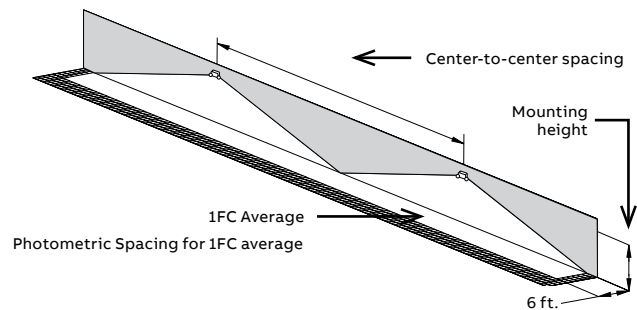
- Unit has a five-year warranty

Detailed warranty terms located on [page 182](#) or online at: www.lightalarms.com

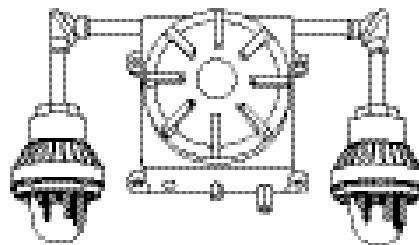


Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
2 X LD1	43'	29'
2 X LD7	55'	36'
2 X LD9	67'	41'
2 X LD10	87'	62'



Dimensions (Dimensions are approximate and subject to change)








Housing: 12" X 12" X 9-1/2"
Mounting Lugs: 10" and
13-1/2" on center
Overall dimensions
(including fixtures): 38" X 38" X 10"

Power consumption chart

Series	Battery	Voltage	DC Specs				AC Specs	
			Battery capacity in watts ¹				Units dual voltage ¹	Current Maximum
			90 Mins	2 Hrs	3 Hrs	4 Hrs		
EXP618	Nickel-Cadmium	6V	18	12	9	6	120/277VAC	0.55/0.25 A
EXP630		6V	30	20	15	10		
EXP1224		12V	24	18	12	9		
EXP1240		12V	40	30	20	15		

¹ All units 120/277 dual voltage, information based on wiring to specific voltage type

Standard configurations for EXP6N and EXP12N series

Unit	Catalog number	Description
	EXP618	6 Volt self contained hazardous location emergency battery unit 18 watts of remote capacity
	EXP618-TS	6 Volt self contained hazardous location emergency battery unit 18 watts of remote capacity. Transfer switch included for use with remote Exit signs (maximum 5 Exits signs per TS)
	EXP1240E1LD9	12 Volt self contained hazardous location emergency battery unit with one head containing 2 X 12V 5W MR16 LED lamps, 30 watts of remote capacity
	EXP1240E1LD9-TS	12 Volt self contained hazardous location emergency battery unit with one head containing 2 X 12V 5W MR16 LED lamps, 30 watts of remote capacity. Transfer switch included for use with remote Exit signs (maximum 5 Exit signs per TS)
	EXP630E2LD1	6 Volt self contained hazardous location emergency battery unit with two heads, each containing 2 X 6V 4W MR16 LED lamps, 14 watts of remote capacity
	EXP630E2LD1-TS	6 Volt self contained hazardous location emergency battery unit with two heads, each containing 2 X 6V 4W MR16 LED lamps, 14 watts of remote capacity. Transfer switch included for use with remote Exit signs (maximum 5 Exit signs per TS)
	EXP618-TSX1-LR	6 volt self contained exit sign with 15 watts of remote capacity. Transfer switch included for use with integral exit sign and additional remote exit signs (maximum 5 exit signs per TS).
	EXP1230-E1LD10-TSX1-LR	12 volt self contained combination unit with 15 watts of remote capacity. Transfer switch included for use with integral exit sign and additional remote exit signs (maximum 5 exit signs per TS).

Ordering format

Series	DC Voltage	Capacity	No. of heads and lamps	Lamp wattage/Type	Battery options
EXP = Battery Unit/ Combo	6 = 6VDC 12 = 12VDC	18 = 18W (6V only) 30 = 30W (6V only) 24 = 24W (12V only) 40 = 40W (12V only)	Blank = No emergency head -E1= Single head, two lamps -E2= Two heads, two lamps each	LD1= 6V-4W, MR16 LED LD7= 12V-4W, MR16 LED LD9= 12V-5W, MR16 LED LD10= 12V-6W, MR16 LED	Blank= no transfer panel -TS= transfer panel (Required to supply remote exit sign only)
Example: EXP630-E1LD1-TSX1-LR			EXIT sign # of faces Blank= No exit sign X1= Single-face exit	EXIT sign lamp Blank= no exit sign -L= LED exit sign	EXIT sign letter color Blank= No exit sign R= Red G= Green