



REMOTE FIXTURE EPF401 SERIES

Hazardous Location Remote Fixtures

TYPE _____

CATALOG # _____

NOTES _____

FEATURES

Description

- Indoor use
- Available as a single or double
- Heavy cast aluminum
- Pyrex Lenses

Finish

- Painted Grey

Mounting

- Surface Mount: Wall or Ceiling
- Pendant Mount: Single Head or Double Head
- Pendant mount including hazardous location elbows, swivels and conduit extension pipe (6" increments)
- Combination hazardous location junction box/mounting plate
- Conduit entry 1/2" NPT

Approval

- UL Listed for use in Paint Spray Areas (75W max)
- Class I, Division 1&2, Groups C and D
- Class II, Division 1&2, Groups E, F and G
- Class III, Division 1&2, (150W max)
- Complies with NEC, OSHA and NEMA for above classes and groups

OPTIONS

(Add Suffix to Model No.)

Angle Reflector: Highly reflective white finish inside and out. Attaches to globe holder ring with four screws

Suffix



-AG

Dome Reflector: Highly reflective white finish inside and out. Attaches to globe holder ring with four screws



-DM

Guard: One-piece aluminum casting construction. Attaches to globe holder ring with four screws



-GD


LAMP SELECTION CHART

HIGH INTENSITY TUNGSTEN				
LAMP SUFFIX	VOLTAGE	WATTAGE	LUMENS	REPLACEMENT #
L18	6	18	300	570.0037-L
L9	12	9	126	570.0011-L
L18	12	18	276	570.0030-L

BI-PIN HALOGEN				
LAMP SUFFIX	VOLTAGE	WATTAGE	LUMENS	REPLACEMENT #
LH4	6	6	113	580.0012-L
LH5	6	8	163	580.0013-L
LH7	6	10	200	580.0017-L
LH1	6	15	210	580.0086-L
LH8	12	8	163	580.0030-L
LH3	12	12	276	580.0015-L

DIMENSIONS

Dimensions are approximate and subject to change.

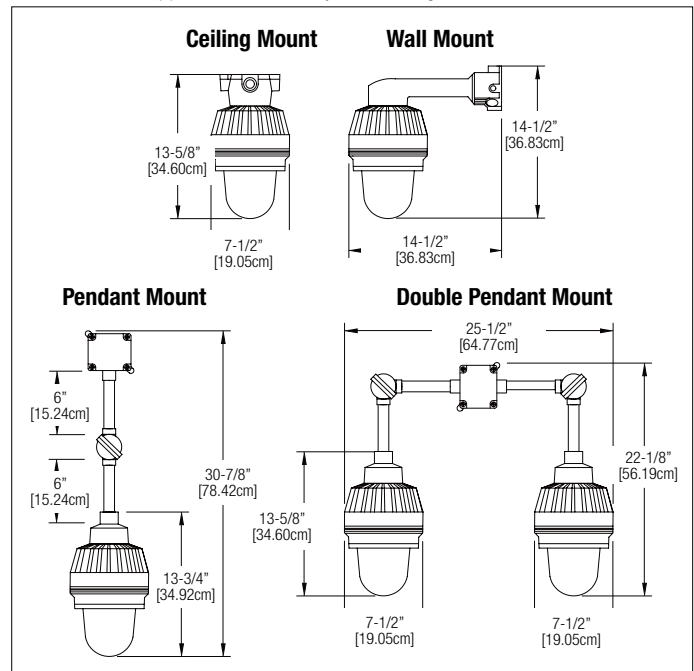

ORDERING FORMAT

SERIES	MOUNTING	LAMP SUFFIX	VOLTAGE	OPTIONS
EPF401= Single Lamp Remote Fixture	W= Wall Mount C= Ceiling Mount P= Pendant Mount D= Double Pendant Mount	/ _____ ¹	6= 6 VDC 12= 12 VDC	Blank= No Option -AG= Angle Reflector -DM= Dome Reflector -GD= Guard
		¹ Choose from lamp selection chart		

EXAMPLE: EPF401W/L96