

## Quick™ QLX & QLXN Series

Economical, thermoplastic LED exit signs



### Construction

- UV stabilized thermoplastic body
- 6 inch EXIT lettering legend, available in red or green
- Field selectable chevrons

### Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-Box mounting

### Finishes

Mist white

### Electronics

- Optional Improved Diagnostics
- 120/277 60Hz

### Approvals

- UL 924 listed
- Damp location 50°F to 104°F (10°C to 40°C)
- UL 94, 5VA flame rated


**Warranty** (subject to proper installation and maintenance)

Three-year full warranty

Detailed warranty terms located on **page 182** or online at: [www.lightalarms.com](http://www.lightalarms.com)



**Dimensions** (Dimensions are approximate and subject to change):

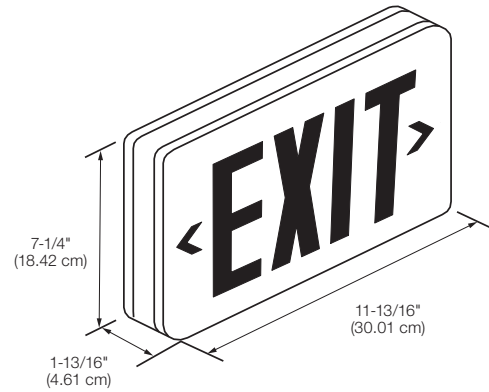

**Power consumption chart**

**AC input**

120/277VAC, 60Hz maximum 2.5W

**Accessories** (Order as a separate item)

Description	Product code
Wire guard (wall mount)	WG1-L
Wire guard (ceiling mount and end mount)	WG5-L

**Ordering format**

Series	Legend color	Options
QLX500= AC-Only	RN= Red	Blank= No option
QLXN500= Self-powered	GN= Green	-ID= Improved Diagnostics (audible) <sup>1</sup>
		-RID= Remote capacity 3.6V-3.6W Improved Diagnostics (audible) <sup>1, 2</sup>

**Example: QLXN500RN**

<sup>1</sup> Available with red legend only

<sup>2</sup> Remote capacity for (1) ELF612D/LED or (2) ELF612/LED remote heads only