

THE **SQUIRE** SERIES



Combination





Self-powered UX2E series

AC only and self-powered EN model

Thermoplastic Exit Signs AC Only, AC/DC or Self Powered Incandescent or LED

Dimensions are approximate and subject to change.

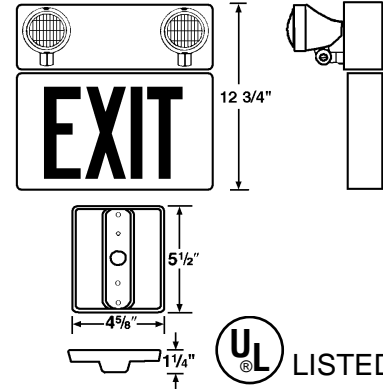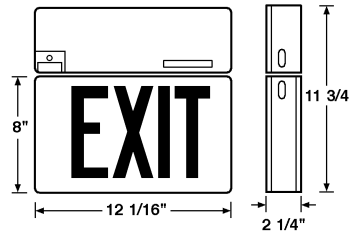

features

- **DAMP LISTED:** All AC-Only exit signs, both incandescent and LED are U.L. Listed for use in damp locations.
- **HOUSING:** Rugged high impact thermoplastic construction in white or black.
 - Stencil and open face signs have programmable directional chevrons.
 - Interchangeable face and backplate makes it easy to convert to either single or double face applications.
- **LIGHT SOURCE:** Incandescent or LED have even illumination for excellent legibility.

emergency models

- Sealed maintenance-free Lead Calcium battery. Nickel Cadmium available.
- Batteries provide 90 minutes of emergency operation.
- Snap on power packs are available to convert AC-only signs into self-powered signs. The power packs for combination units are factory installed.
- Dual voltage (120/277)
(Specify voltage for AC only units)

Available as emergency combination unit with choice of large or mini heads.
Mini System/Combo Unit Capacity (UX2E Series): No heads=26 watts remote, 2 heads=15 watts remote.

charger

- Fully automatic charger
- Temperature compensated
- Low voltage battery disconnect
- Brownout protection
- Lockout (automatic battery connect)
- Combination AC pilot light / test switch

lamps

- Supplied with (2) 15T6 145V extended life incandescent lamps which consume 12 watts each.
- For LED Models refer to the Quickie Series on Page 29.

ordering information

To order, specify the model number per the following sequence **Example: UX2EWRWLED**

Style	Model	Type	Color	Letter Color	Stencil	Voltage (AC Only)	Light	Options	Combo Unit
U= Universal 2 faces & canopy	X2 Series	Blank= AC Only E= Self-Powered Lead Calcium EN= Self-Powered Nickel Cadmium	W= White B= Black	R= Red G=Green	W= White B= Black A= Aluminum	Blank= 120 Volt 277= 277 Volt	Blank= Incandescent LED=LED	PK6=6VDC (Inc) PK12=12VDC (Inc) (Voltage)-2= Dual Circuit FAF= Fire Alarm Flasher (incand.only) FB= Flasher/Buzzer TP= Tamper Proof Screws	/0=0 heads power use for remote fixtures /1L= 1 Large head emergency light /1M= 1 Mini head emergency light /2L= 2 Large heads emergency light /2M= 2 Mini heads emergency light

accessories

(order as separate item)

Canopy Kit Black.....	Model CX2B
Canopy Kit White	CX2W
277 Volt Conversion Kit-Black	CTXB-277
277 Volt Conversion Kit-White	CTXW-277
Field Convertible Power Pack-Black	E2B
Field Convertible Power Pack-White	E2W
Black Pendant Mount Kit (12") other length consult factory	PB
White Pendant Mount Kit (12") other length consult factory.....	PW

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.