


Extruded Aluminum Exit Signs

AC Only, AC/DC or Self Powered
Incandescent or LED



Dimensions are approximate and subject to change.

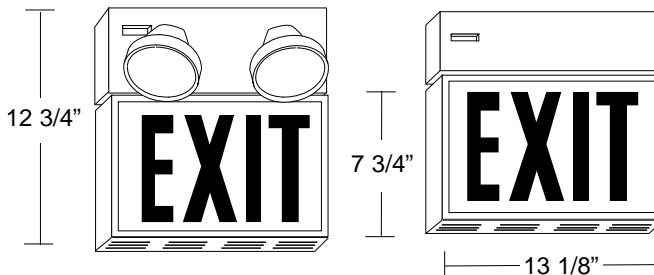

LED Combination units have additional 15 watts remote capacity with (2) 5.4 watt mounted heads. Incandescent combo units do not have remote capacity.

features

- **DAMP LISTED:** All AC-Only exit signs, both incandescent and LED are U.L. Listed for use in damp locations.
- **HOUSING:** constructed of extruded aluminum. Includes universal chevrons and a bottom aperture that provides a downlight effect.
 - Universal exit signs are supplied with canopy kit and extra stencil and diffuser set to permit any mounting either as single or double face.
- **LIGHT SOURCE:** Incandescent or LED. Both have even illumination for excellent legibility.

emergency models charger

- Sealed maintenance-free Lead Calcium battery. (Nickel Cadmium Battery available, specify "N" in the part number as shown below.)
- Self Powered LED models feature a Nickel Cadmium battery and are self contained. All circuitry and batteries are contained inside the exit housing.
- Batteries provide 90 minutes of emergency operation.
- Available in incandescent or LED.
- Dual voltage (120/277)

- Fully Automatic, temperature compensated pulse type charger.
- Low voltage battery disconnect
- Brownout protection
- Momentary test switch.

Available as emergency combination unit with choice of large or mini heads.

lamps

- Supplied with (2) 15T6 145V extended life incandescent lamps which consume 12 watts each.
- Available with 2 watt LED Light Source.

ordering information

To order, specify the model number per the following sequence **Example: UX3EWRWFL**

Style	Model	Type	Color	Letter Color	Stencil	Voltage (AC Only)	Light	Options	Combo Unit
U= Universal 2 faces & canopy	X3 Series	Blank= AC Only E= Self-Powered EN= Self-Powered Nickel Cadmium	W= White B= Black	R= Red G=Green	W= White B= Black A= Aluminum	Blank= 120 Volt 277= 277 Volt	Blank= Incandescent LED= LED	K6= 6V DC K12= 12V DC K24= 24V DC (Voltage)-2= Dual Circuit FAF= Fire Alarm Flasher (incand.only) FB= Flasher/Buzzer	/0=0 heads power use for remote fixtures /1L= 1 Large head emergency light /1M= 1 Mini head emergency light /2L= 2 Large heads emergency light /2M= 2 Mini heads emergency light

accessories

(order as separate item)

Canopy Kit Black.....	Model CB-M
Canopy Kit White	CW-M
277 Volt Conversion Kit-Black	CTXB-277
277 Volt Conversion Kit-White	CTXW-277
Black Pendent Mount Kit (12") other length consult factory	PB
White Pendent Mount Kit (12") other length consult factory.....	PW

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.