


ELF640 Series

ELF640 vandal resistant




Dimensions (Dimensions are approximate and subject to change)

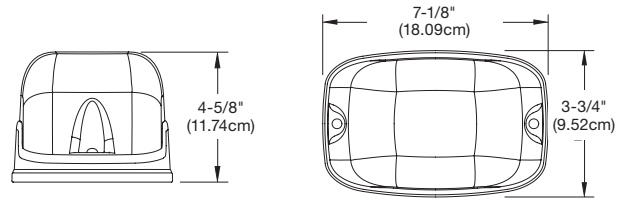

Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	39'	34'
LD7	49'	39'
LD9	68'	54'
LD10	89'	80'
LD13	51'	39'

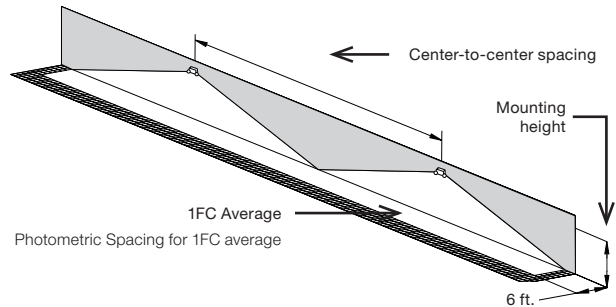

Description

- ELF640 & ELF640P vandal resistant for indoor use with choice of cast aluminum or plastic back plate
- Include clear polycarbonate UV impact resistant cover

Lamp type

Choice of MR16 LED lamp voltages and wattages

Mounting

- Surface Mount
- Universal J-Box mounting

Approvals

- UL 924 Listed
- Vandal Resistant

Warranty (subject to proper installation and maintenance)

Unit: five-year full warranty

Detailed warranty terms located on **page 182** or online at: www.lightalarms.com



Lamp selection chart

Lamp suffix	Voltage	Wattage	Lumens	MR 16 LED lamps
				Replacement #
LD1	6	4	130	580.0097-L
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0104-L
LD10	12	6	510	580.0106-L
LD13	24	4	200	580.0098-L

Ordering format

Series	Lamp suffix	Color	Voltage	Options
ELF640P= All polycarbonate single head for dry location	/_____ ¹	-M= White	6= 6 VDC	Blank= no option
ELF640PD= All polycarbonate double head for dry location		-B= Black	12= 12 VDC	T= tamper proof screws
ELF640= Die-Cast back plate single head for dry location		-G= Gray	24= 24V DC	
ELF640D= Die-Cast back plate double head for dry location				

Example: ELF640D/LD7-M12

¹Choose from lamp selection chart