



TYPE _____

CATALOG # _____

NOTES _____

X402 EXIT SIGN SERIES

Class I, Division 1 & 2, Groups C and D
Class II, Division 1 & 2, Groups E, F and G



FEATURES

Description

- Indoor use
- Available as single or double face with red or green Legend
- Heavy cast aluminum
- Pyrex Lenses

Finish

- Painted Grey

Mounting


- Surface Mount: Wall or Ceiling
- Pendant Mount
- Pendant mount including hazardous location elbows, swivels and conduit extension pipe (6" increments)
- Combination hazardous location junction box/mounting plate
- Conduit entry 1/2" NPT

Approval

- UL Listed for use in Paint Spray Areas (75W max)
- Class I, Division 1&2, Groups C and D
- Class II, Division 1&2, Groups E, F and G
- Class III, Division 1&2, (150W max)
- Complies with NEC, OSHA and NEMA for above classes and groups

DIMENSIONS

Dimensions are approximate and subject to change.

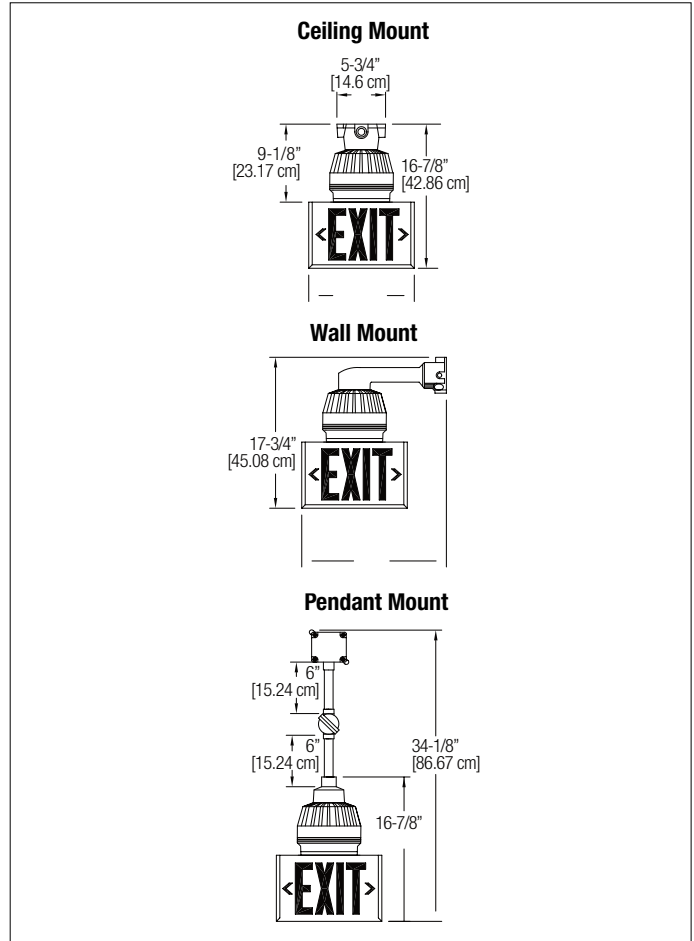

LAMP SELECTION CHART, X402 EXIT SIGN (ONLY) (lamp automatically specified in model number based on voltage of unit)

LAMP TYPE	VOLTAGE	LAMP WATTAGE	LAMP TYPE	AVERAGE LIFE (HOURS)	LAMP SUFFIX	REPLACEMENT LAMP PART #
Quartz Bi-Pin	6V	15W	JC-6V15W	2000	6	580.0086-L
	12V		25A-12	1000	12	570.0071-L
Medium Base	24V	25W	143A	1000	24	570.0118-L
	120V		A19	2500	120	570.0136-L

ORDERING FORMAT

AC-Only or AC/DC Exit Sign					
	Faces	Series	Mounting	Lamp	Legend color
	1= Single Face 2= Double Face	X402	C= Ceiling W= Wall P= Pendant	-6= 6V -12= 12V -24= 24V -120= 120V	R= Red G= Green
Transfer Panel (Required for the operation of the X402 AC/DC Exit Sign)					
	AC voltage	DC voltage	Series	Watts	
	120= 120V AC 277= 277V AC	-6= 6V DC -12= 12V DC -24= 24V DC	-TS	-25= 25W -50= 50W -75= 75W -100= 100W	

EXAMPLE: AC-Only or AC/DC Exit Sign: 1X402C12R, Transfer Panel (needed for AC/DC operation): 12012TS25