

## Remote Fixture Decorative™ Series

Contemporary and enduring style



### Description

- Indoor use
- Available as a single, double or triple MR16 LED size lighting head
- Die cast aluminum construction

### Finish

Powder-coated off-white, black or brushed nickel

### Lamp type

Choice of MR16 LED lamp wattages

### Mounting

- Surface Mount
- Must order appropriate housing with decorative head selection for installation into new construction ceiling (LU-GRHR03) or non-insulated ceiling (LU-GRHR05) GU10 or Insulated ceiling (LU-GRHR06)

### Approval

UL 924 Listed

### Warranty (subject to proper installation and maintenance)

Unit: three-year full warranty

Detailed warranty terms located on [page 182](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)




### Series


	<b>RSTH18R:</b> concave (egress/ regress)	<b>Description:</b> Decorative lighting head
		<b>Dimensions:</b> 4.0" diameter base
		<b>Color Suffix:</b> -WH = White or -BN = Brushed Nickel, -BK= Black
	<b>RSTH19:</b> pop-out	<b>Description:</b> Decorative lighting head
		<b>Dimensions:</b> 4.0" diameter base
		<b>Color Suffix:</b> -WH = White, -BK= Black
	<b>LU-GRHR03</b>	<b>Housing Enclosure Description:</b> New construction housing
		<b>Dimensions:</b> 5.6" x 14.24"
	<b>LU-GRHR05</b>	<b>Housing Enclosure Description:</b> New construction housing New construction housing for GU10 (MR16 120V)
	<b>LU-GRHR06</b>	<b>Housing Enclosure Description:</b> Insulated ceilings housing
		<b>Dimensions:</b> 7.25" x 14.24"

### Photometric performance


Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	43'	36'
LD7	55'	43'
LD9	71'	56'
LD10	100'	85'
LD13	56'	44'
LD14	100'	85'
LD26	43'	39'

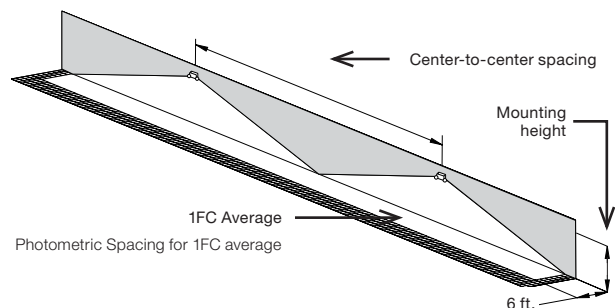


**Dimensions** (Dimensions are approximate and subject to change)

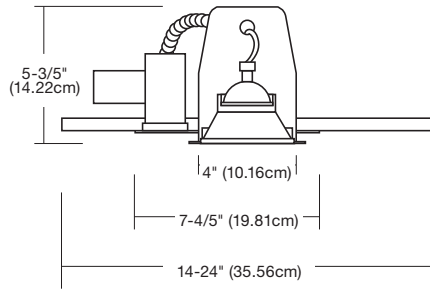

**LU-GRHR03**

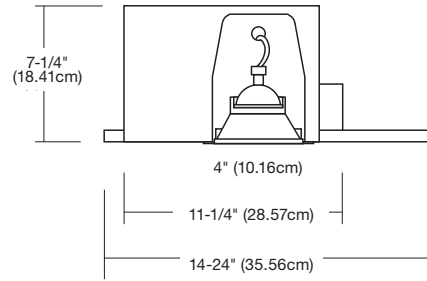

**LU-GRHR06**

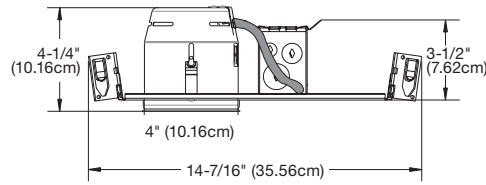

**LU-GRHR05**

**Lamp selection chart – MR16 LED lamps**

Lamp suffix	Voltage	Wattage	Lumens	Replacement #
LD1	6	4	130	580.0097-L
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0098-L
LD10	12	6	540	580.0106-L
LD13	24	4	200	580.0104-L
LD14	24	6	590	580.0100-L
LD26	120	4	200	580.0113-L

**MR16 LED lamps compatibility chart**

Head style	6V-4W	12V-4W	24V-4W	12V-5W	12V-6W	120V 4W	24V-6W
RSTH18R	X	X	X	X	X	X	X
RSTH19	X	X	X	X	X	X	X

**Ordering format**

Series	Lamp suffix	Color	Voltage
RSTH18R	/_____ <sup>1</sup>	<b>WH</b> = White	<b>6</b> = 6 VDC
RSTH19	/_____ <sup>1</sup>	<b>-BK</b> = Black	<b>12</b> = 12 VDC
		<b>-BN</b> = Brushed nickel (available with RSTH18R only)	<b>24</b> = 24 VDC
			<b>120</b> = 120 VAC/VDC

**Example: RSTH18R/LD9-WH and LU-GRHR03**

With Housing Enclosure Example: LU-GRHR06 (for Insulated Ceiling installation)

<sup>1</sup> Choose from lamp selection chart