



TYPE \_\_\_\_\_

CATALOG # \_\_\_\_\_

NOTES \_\_\_\_\_

# REMOTE FIXTURE DECORATIVE™ SERIES

Contemporary and Enduring Style

## FEATURES

### Description

- Indoor Use
- Powder-coated die cast aluminum construction
- Tool-less lamp head adjust ability
- Glass MR16 lamp lens
- Choice of MR16 Halogen or LED Lamp

### Finish



- Choice of White, Black, Brushed Nickel

### Mounting

- Recessed Ceiling Mount
- Must order appropriate housing with Decorative head selection for installation into new construction ceiling (LU-GRHR03) or Non-Insulated ceiling (LU-GRHR05) GU10 or Insulated ceiling (LU-GRHR06)

## DIMENSIONS

Dimensions are approximate and subject to change.

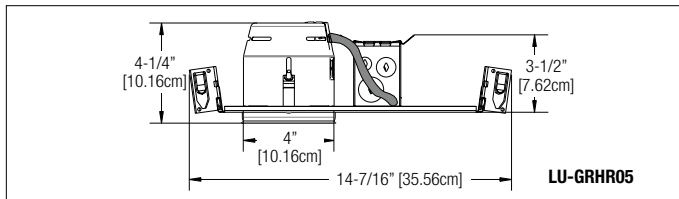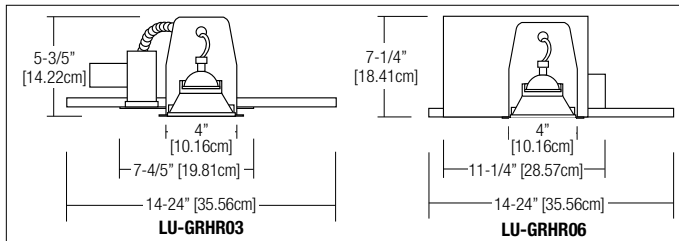

## SERIES

|  |  |   |
|--|--|---|
|  | <b>RSTH24: flat (tilting round front load)</b>   | <b>Description:</b> Decorative lighting head<br><b>Dimensions:</b> 4.0" diameter base<br><b>Color Suffix:</b> -WH= White -BN= Brushed Nickel                  |
|  | <b>RSTH18: concave (tilting round rear load)</b> | <b>Description:</b> Decorative lighting head<br><b>Dimensions:</b> 4.0" diameter base<br><b>Color Suffix:</b> -WH= White or -BN= Brushed Nickel               |
|  | <b>RSTH18R: concave (egress/regress)</b>         | <b>Description:</b> Decorative lighting head<br><b>Dimensions:</b> 4.0" diameter base<br><b>Color Suffix:</b> -WH = White or -BN = Brushed Nickel, -BK= Black |
|  | <b>RSTH19: pop-out</b>                           | <b>Description:</b> Decorative lighting head<br><b>Dimensions:</b> 4.0" diameter base<br><b>Color Suffix:</b> -WH = White, -BK= Black                         |
|  | <b>LU-GRHR03</b>                                 | <b>Housing Enclosure</b><br><b>Description:</b> New construction housing<br><b>Dimensions:</b> 5.6" x 14.24"  |
|  | <b>LU-GRHR05</b>                                 | <b>Housing Enclosure</b><br><b>Description:</b> New construction housing<br><b>New construction housing for GU10 (MR16 120V)</b>                              |
|  | <b>LU-GRHR06</b>                                 | <b>Housing Enclosure</b><br><b>Description:</b> Insulated ceilings housing<br><b>Dimensions:</b> 7.25" x 14.24"   |

## LAMP SELECTION CHART

| MR 16 HALOGEN LAMPS |         |         |        |               |
|---------------------|---------|---------|--------|---------------|
| LAMP SUFFIX         | VOLTAGE | WATTAGE | LUMENS | REPLACEMENT # |
| M5                  | 6       | 5       | 34     | 580.0072-L    |
| M6                  | 6       | 6       | 40     | 580.0074-L    |
| M10                 | 6       | 10      | 74     | 580.0079-L    |
| M10                 | 12      | 10      | 84     | 580.0099-L    |
| M12                 | 12      | 12      | 80     | 580.0080-L    |
| M20                 | 12      | 20      | 150    | 580.0064-L    |
| MH20                | 12      | 20-H    | 400    | 580.0068-L    |
| M35                 | 12      | 35      | 430    | 580.0083-L    |
| MH35                | 12      | 35-H    | 830    | 580.0090-L    |
| MH31                | 12      | 37-H    | 900    | 580.0088-L    |
| M50                 | 12      | 50      | 700    | 580.0076-L    |
| MH50                | 12      | 50-H    | 1460   | 580.0089-L    |
| M12                 | 24      | 12      | 82     | 580.0070-L    |
| M20                 | 24      | 20      | 240    | 580.0077-L    |
| MA20                | 24      | 20-A    | 220    | 580.0094-L    |
| M35                 | 24      | 35      | 235    | 580.0084-L    |
| M50                 | 24      | 50      | 670    | 580.0076-L    |
| M20 (GU10)          | 120     | 20      | 100    | 580.0065-L    |
| M35 (GU10)          | 120     | 35      | 230    | 580.0066-L    |

| MR16 LED LAMPS |         |         |        |               |
|----------------|---------|---------|--------|---------------|
| LAMP SUFFIX    | VOLTAGE | WATTAGE | LUMENS | REPLACEMENT # |
| LD1            | 6       | 4       | 130    | 580.0097-L    |
| LD7            | 12      | 4       | 170    | 580.0093-L    |
| LD9            | 12      | 5       | 340    | 580.0098-L    |
| LD10           | 12      | 6       | 540    | 580.0106-L    |
| LD13           | 24      | 4       | 200    | 580.0104-L    |
| LD26           | 120     | 4       | 200    | 580.0113-L    |
| LD14           | 24      | 6       | 590    | 580.0100-L    |

| MR16 LED LAMPS COMPATIBILITY CHART |       |        |        |        |        |         |        |
|------------------------------------|-------|--------|--------|--------|--------|---------|--------|
| HEAD STYLE                         | 6V-4W | 12V-4W | 24V-4W | 12V-5W | 12V-6W | 120V-4W | 24V-6W |
| RSTH18                             | X     | X      | X      | -      | -      | -       | -      |
| RSTH18R                            | X     | X      | X      | X      | X      | X       | X      |
| RSTH19                             | X     | X      | X      | X      | X      | X       | X      |
| RSTH24                             | -     | -      | -      | -      | -      | -       | -      |

## ORDERING FORMAT

(Must also order Housing Enclosure based on Ceiling Type, sold separately)

| SERIES  | LAMP SUFFIX                                   | COLOR                                   | VOLTAGE          |
|---------|---|---|------------------|
| RSTH24  | / _____ <sup>1</sup>                          | -WH= White                              | 6= 6 VDC         |
| RSTH18  |   | -BK= Black (available with RSTH24 only) | 12= 12 VDC       |
| RSTH18R |   | -BN= Brushed Nickel                     | 24= 24 VDC       |
| RSTH19  | <sup>1</sup> Choose from lamp selection chart | (available with RSTH19)                 | 120= 120 VAC/VDC |

### EXAMPLE: RSTH18/M6-WH

With Housing Enclosure Example: LU-GRHR06 (for Insulated Ceiling installation)