



TYPE _____

CATALOG # _____

NOTES _____

REMOTE FIXTURE ELF651 SERIES

Class I Division 2, Groups A, B, C and D
Certified Remote Fixture

FEATURES

Description

- Available with single or double lamp heads with high-efficiency MR16 halogen lamps of 10W, 12W or 20W or high-output LEDs of 4W, 5W or 6W
- Die-Cast aluminum back plate with gasket. Clear polycarbonate cover, UV and impact resistant
- Input voltage: 6V, 12V, 24V or 120V
- Easy installation on a 4" octagonal box (included). Comes standard with tamper-proof screws and bit
- Extreme operational temperature range: -40°F to +104°F (-40°C to +40°C)
- Indoor use
- Fully adjustable tool-less aiming swivel
- Tool-less easy lamp replacement

Finish

- Gray

Mounting


- Surface Mount
- Conduit entry 1/2" NPT

Approval

- Evaluated to UL 844 Standard for Class I Division 2, Groups A, B, C and D. Temperature Codes: T3B (10W and 12W MR16 lamps) and T2C (20W MR16 lamps) and T4A and T5 MR16 LED

DIMENSIONS

Dimensions are approximate and subject to change.

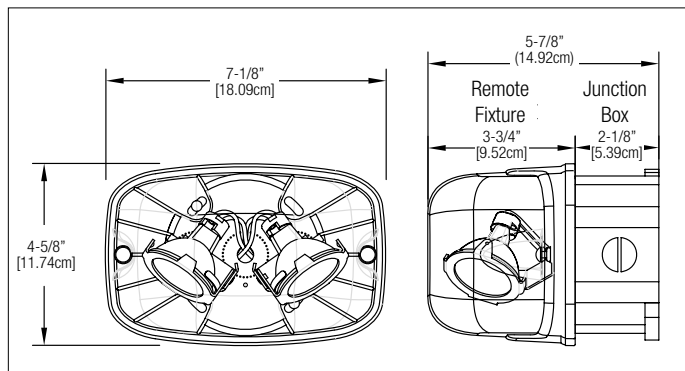

LAMP SELECTION CHART

MR16 HALOGEN LAMPS						
LAMP SUFFIX	VOLT	WATT	LUMENS	REPLACEMENT NUMBER	TEMP CODE	MAX TEMP
M10	6	10	74	580.0079-L	T3B	329°F/165°C
M12	12	12	80	580.0080-L	T3B	329°F/165°C
MH20	12	20-H	400	580.0068-L	T2C	446°F/230°C
M12	24	12	82	580.0070-L	T3B	329°F/165°C
M20	24	20	240	580.0077-L	T3B	221°F/105°C
M20	120	20	100	580.0065-L	T2C	257°F/125°C

MR16 LED LAMPS						
LAMP SUFFIX	VOLT	WATT	LUMENS	REPLACEMENT NUMBER	TEMP CODE	MAX TEMP
LD1	6	4	200	580.0097-L	T4A	248°F/120°C
LD7	12	4	220	580.0093-L	T5	212°F/100°C
LD9	12	5	340	580.0104-L	T4A	248°F/120°C
LD10	12	6	540	580.0106-L	T4	275°F/135°C
LD13	24	4	220	580.0098-L	T5	212°F/100°C
LD26	120	4	230	580.0113-L	T4A	248°F/120°C

ORDERING FORMAT

SERIES	LAMP SUFFIX	COLOR	VOLTAGE
ELF651= Single lamp remote fixture ELF651D= Double lamp remote fixture	/ _____ ¹	-G= Gray	6= 6 VDC 12= 12 VDC 24= 24 VDC 120= 120 VAC/VDC
	¹ Choose from lamp selection chart		

EXAMPLE: ELF651/M10-G6