



SIMPLICITY™ ACCESSIBILITY SERIES

Slim Profile LED Edge-Lit Exit
Accessibility Sign

TYPE _____

CATALOG # _____

NOTES _____

FEATURES

Construction

- Housing made of extruded aluminum, canopy made of Die-Cast aluminum
- Legend panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in Red with Accessibility Symbol

Mounting

- Single face model includes (1) legend panel, (1) housing and (1) canopy
- Double face model includes (1) legend panel (with EXIT and symbol printed on each side), (1) housing and (1) canopy
- Canopy included for wall, end or ceiling mount applications

Finishes

- Choice of housing and trim plate finishes, off white or textured aluminum
- Choice of Legend panel colors, red on clear, red on white, red on mirror

Chevrons:

- Field installed stick-on translucent chevrons, (2) for single face, (4) for double face

LEDs

- Red Long-Life Light Emitting Diodes (LED) illumination

Self-Diagnostics

- Not Available

Special Wording Panels

- Available. Contact your sales representative with your design requirements

Approvals

- Listed to UL 924 Standards
- RoHs Compliant

Connecticut State Fire Safety Code PARA 1011.1.2

1011.1.2 Accessible exits. Where exit signs are required by Section 1011.1 of this code, accessible exit doors at the level of exit discharge that lead directly to accessible paths of exit discharge shall additionally be marked by the International Symbol of Accessibility. Such symbol shall be not less than 6 inches high and shall be incorporated into the required exit sign or shall be located directly adjacent to it. Such symbol shall meet the requirements of Section 1011.

Warranty (subject to proper installation and maintenance)

- Three-Year full warranty

Detailed warranty terms located at: <http://www.lightalarms.com>

SPECIFICATIONS

Supply and Install **Lightalarms® Simplicity™ International Symbol of Accessibility (ISA) SE, SES, SEN Series.**

The Exit Accessibility Sign specified as surface mount single face shall be standard with (1) legend panel, (1) housing and (1) canopy and specified as double face shall be standard with (1) legend panel (with EXIT and symbol printed on each side) (1) housing and (1) canopy.

Surface mount housing shall be made of extruded aluminum, canopy made of Die-Cast aluminum. Housing and canopy shall be matching in color, (OW) off white or (TA) textured aluminum. Legend panel colors shall be (RC) red on clear, (RW) red on white, (RM) red on Mirror.

Click-to-open housing door allows easy access to legend panel and electrical wiring. The legend panel shall come standard with (4) field installed stick-on translucent directional chevron indicators. The surface mount single face Exit Accessibility Sign shall be suitable for surface wall, end or ceiling installations. The surface mount double face Exit Accessibility Sign shall be suitable for surface end or ceiling installations.

The illumination source shall be Light Emitting Diodes (LED) in (R) red color. The LEDs shall provide illumination in normal and emergency operation mode. The LEDs shall be mounted inside the Exit Sign housing on a PCB strip. A color matching LED sensitive EXITAccessibility legend silkscreened in (R) red provides the 6" high by 3/4" stroke EXIT letters with even illumination and no visible LEDs or hot spots.

AC-Only models shall be 120/277VAC, 50/60Hz, with power consumption of less than 2W.

AC/DC models shall be 120/277VAC, 50/60Hz, with power consumption of less than 2W and allows for DC operation from 6VDC to 24VDC, drawing less than 1.5W.

Self-Powered models shall be 120/277VAC, 50/60Hz, with power consumption of less than 3W and be supplied with a sealed maintenance-free Nickel-Cadmium battery, providing at least 90 minutes illumination upon AC failure.

The Exit Accessibility Sign shall be tested by Underwriters Laboratories and listed to UL 924 standards and is RoHS compliant. Includes a three-year full warranty.

The Exit Accessibility Sign shall be **Lightalarms® Model** _____.



TYPE _____

CATALOG # _____

NOTES _____


SIMPLICITY™ ACCESSIBILITY SERIES

Slim Profile LED Edge-Lit Exit
Accessibility Sign




DIMENSIONS

Dimensions are approximate and subject to change.

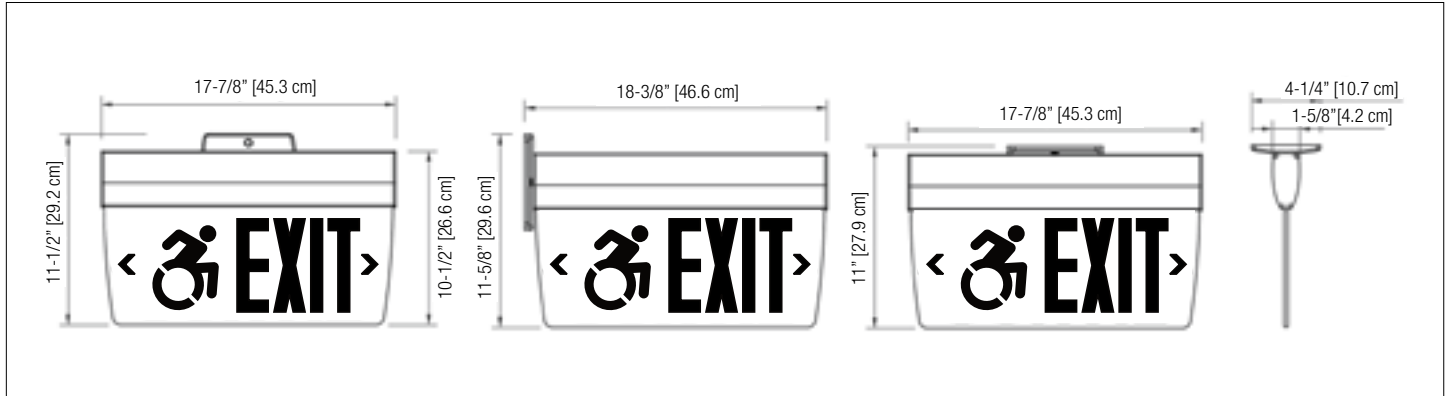

PANEL CONFIGURATION

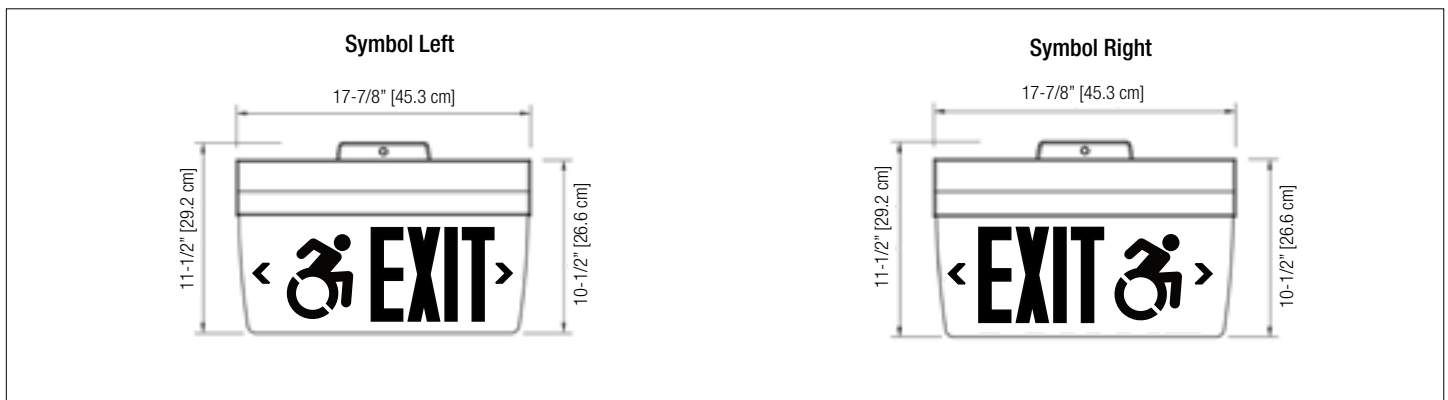

POWER CONSUMPTION CHART

| MODEL | AC SPECS | | DC SPECS | |
|--------------|---------------------|--------------|------------------------|-----------------------|
| AC-Only | 120/277VAC, 50/60Hz | Less than 2W | - | - |
| AC/DC | 120/277VAC, 50/60Hz | Less than 2W | 6 to 24VDC | Less than 1.5W |
| Self-Powered | 120/277VAC, 50/60Hz | Less than 3W | Nickel-Cadmium battery | Minimum of 90 minutes |

ORDERING FORMAT

| PANEL CONFIGURATION | SERIES | HOUSING COLOR | LEGEND COLOR | FACE |
|---|---|--|--|--|
| RISA = Right side, 6" letters & International Symbol of Accessibility ¹ LISA = Left side, 6" letters & International Symbol of Accessibility ¹ | SE = AC Only SES = AC/DC SEN = Self-Powered 90 Minutes | TA = Textured Aluminum OW = Off White | RC = Red on Clear ¹ RW = Red on White RM = Red on Mirror | 1 = Single Face 2 = Double Face |

¹ Red legend / surface mount only

¹ Single face Only

EXAMPLE: ISASENTARMR2