

Infinite Series

Low profile LED emergency lighting



Housing

- Indoor/outdoor suitable for wet location
- Die-cast aluminum housing
- UV-resistant (3" x 1.5") polycarbonate lens

Mounting

- Wall or ceiling mount
- 1/2" rigid conduit top entry
- Universal J-box mounting

Lamp type

- 1600 lumens in AC mode 600 Lumens in emergency mode
- Color temperature: 5000K
- Dual-mode operation: normal and emergency LED lighting with separate AC inputs

Electronics

- Pulse plus charger
- Low voltage disconnect
- Automatic brownout protection
- Battery lock-out
- Fused output circuit
- 120/277 60Hz
- Rated for -13°F to 122°F (-25°C to 50°C)

Photometric performance

Mounting height	Spacing center-to-center (feet)	
	Distance	
7.5'	50'	
10'	63'	

Approvals


- UL 924 Listed
- NEMA-3R Rated for indoor/outdoors cold-weather wet and damp locations: -20°C to 40°C (-4 to 104°F) ROHS compliant
- Meets all NFPA 70, NFPA 101 life safety codes

Warranty (subject to proper installation and maintenance)


Unit: three-year full warranty

Detailed warranty terms located on **page 182 of the catalog** or online at: www.lightalarms.com

NEMA-3R

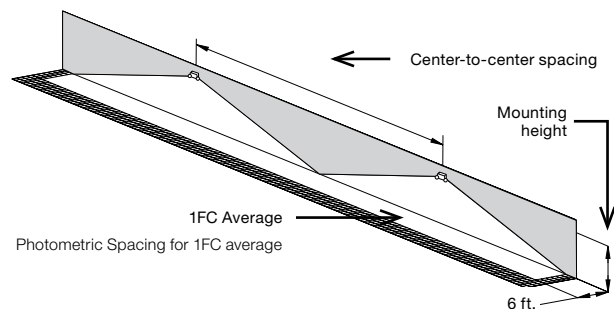

Dimensions (Dimensions are approximate and subject to change)

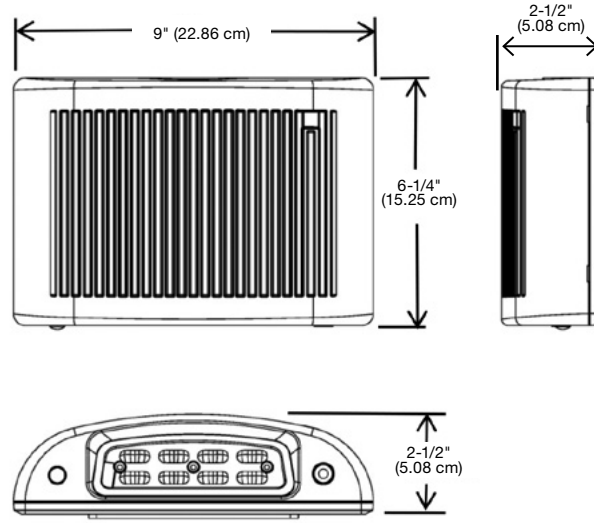

Power consumption chart

Series	DC Specs		AC Specs
	Battery	Voltage	Units dual voltage
AC	-	-	120/277
ACSD	Nickel-Cadmium	7.2V	

Ordering format

Series	Head style / Lamp type	Color	Options
INF = Infinite	AC = AC only ACSD = Dual-mode	DB = Dark bronze	-CW = Cold weather ¹

Example: INFACSDDB

¹ Available on the ACSD