

LSCN Series

Vandal resistant linear remote fixture



Housing

- White high impact thermoplastic housing
- Frosted lens

Mounting

- Standard surface ceiling and wall mount
- Optional accessory: semi-recessed ceiling mount

LED information

- Easily adjustable LED strips for multiple beam angles
- Color temperature: 4000K
- 1200-1300 lumen output

Electronics

- Universal voltage 120V through 277V 60Hz. 12-24VDC
- Compatible with Lightalarms® 12 and 24V battery units

Approvals and ratings

- Rated for -4°F to 113°F (-20°C to 45°C)
- Suitable for wet locations
- Meets IP65 rating
- Meets IK10 rating requirements¹
- ROHS compliant
- UL924 approved

Warranty (subject to proper installation and maintenance)

Unit has a three-year warranty


Detailed warranty terms located **online at: www.lightalarms.com**

¹IK ratings refer to impact tests. IK10= Protected against 20 joules of impact (equivalent to 11lbs. of mass dropped from 16" high)




Spacing

Mounting type	Spacing at 9ft mounting	Lumens
Ceiling mount	62'	1300
Wall mount	53'	1200

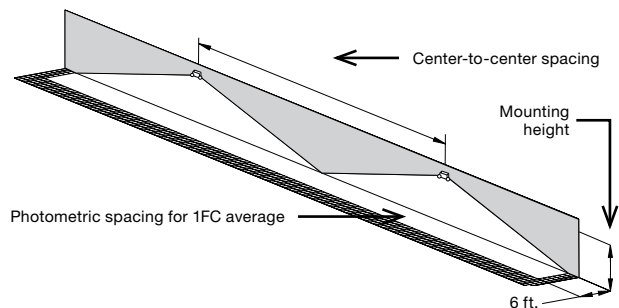

Dimensions (Dimensions are approximate and subject to change)

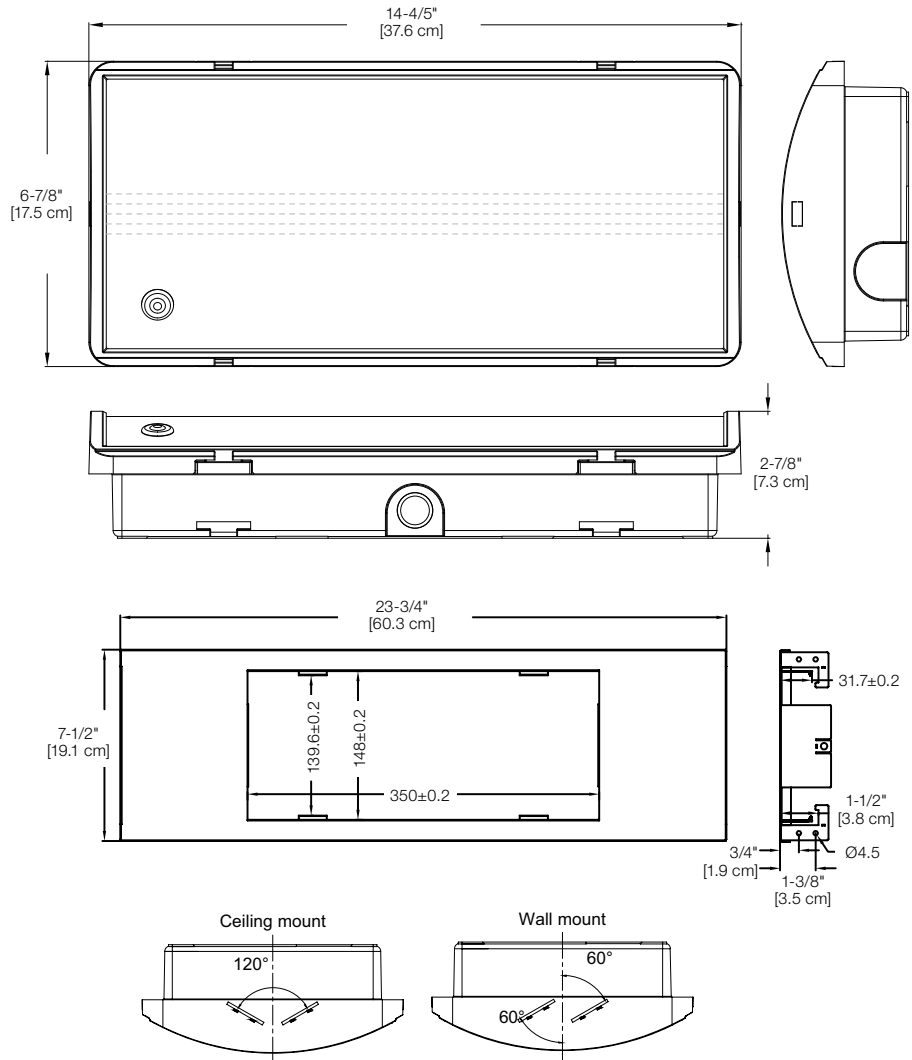

REMOTES & HEADS

Power consumption

	Voltage	Wattage
AC	120-277VAC	14 watts
DC	12-24VDC	13 watts

Accessories (order as a separate item)

Description	Product code
Semi recessed mounting bracket	KIT-SR-LA

Ordering format

Series	
LSCN= Remote linear	-ACDC= ACDC 120-277VAC, -12-24VDC

Example: LSCN-ACDC