




*Decorative Style Equipment  
12 & 24 Volt  
Maintenance-Free  
Long Life, Lead Calcium Battery*



CAL#44804



NRTL. UL 924



**application:** Blending into any environment the Phantom goes undetected. When AC fails and the lights go out, that's when the Phantom emerges to illuminate the path to safety. "The Architectural Choice", enhances architectural and interior designs. The Phantom combines safety with aesthetics, the unseen solution.

## features

- **CONSTRUCTION:** It is designed for ease of installation for the contractor, and quality of finish for the architect or designer. The lighting assembly features a high quality white finish, while the heavy duty galvanized steel back box, with no holes, features a corrosion resistant finish.
- **MOUNTING:** Recess mounts into walls or ceiling. Bar hangers included.
- **ELECTRONICS:**
  - Automatic, temperature compensated, pulse type charger
  - High capacity, automatic, dust tight instantaneous transfer relay
  - Low voltage disconnect prevents over discharge of battery. Automatic brownout protection is provided
  - Fused output circuits
- **CONTROLS:**
  - Internally illuminated test switch
- **POWER REQUIREMENTS:**  
120/277 Volt AC

## battery

Long life, maintenance-free sealed lead calcium.

## dimensions

Dimensions are approximate and subject to change.

For use in walls or ceiling with a cavity, not for use in block walls or solid ceilings

## lamp

The unit includes MR16 lamps supported by metallic swivels, with 100 degrees of aiming.

## unit selection chart


### SELF-POWERED FIXTURES

<b>12PM36-2(12)</b> .....	12 watt heads (12volt, 36 watts)
<b>12PM54-2(12)</b> .....	12 watt heads (12volt, 54 watts)
<b>12PM54-2(20)</b> .....	.20 watt heads* (12volt, 54 watts)
<b>12PM70-2(35)</b> .....	.35 watt heads* (12 volt, 70 watts)
<b>12PM100-2(50)</b> .....	.50 watt heads* (12 volt, 100 watts)

\*do not exceed rated unit capacity.

### REMOTE FIXTURES

<b>12PMR12-2</b> .....	(2 heads, 12 volt, 12 watts each)
<b>24PMR12-2</b> .....	(2 heads, 24 volt, 12 watts each)
<b>12PMR20-2</b> .....	(2 heads, 12 volt, 20 watts each)
<b>24PMR20-2</b> .....	(2 heads, 24 volt, 20 watts each)
<b>12PMR35-2</b> .....	(2 heads, 12 volt, 35 watts each)
<b>24PMR35-2</b> .....	(2 heads, 24 volt, 35 watts each)

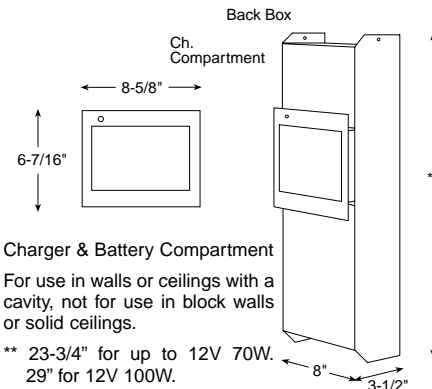

## ordering format

**12PM36-2**  
|  
Series

*Custom Colors and Finishes available upon request*

## options

(Add Suffix to Model No.) Suffix  
Improved Diagnostics ..... -ID

## accessories

(Order as a separate item) Suffix  
Remote test switch ..... -RTS