

SERIES PQ, P12Q




Black Housing Available

Industrial / Commercial Unit Equipment
6 or 12 Volt Maintenance-free
Lead Calcium Battery



CAL#32651

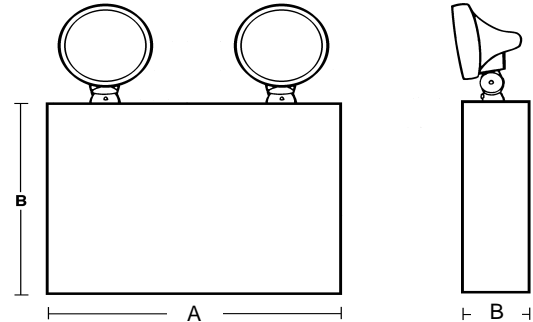

MODEL 2PQ2 complies with requirements of Federal Specifications W-L-00305D Type I, Class I, Style E.

Dimensions are approximate and subject to change.

application

Effective, functional unit designed with high capacity maintenance-free batteries for industrial, institutional and commercial environments requiring remote capability or extended operating times.

features

- **HOUSING:** Heavy duty steel case with front access panel and mist white enamel finish.
- **MOUNTING:** Conduit knockouts and rear keyhole mounting slots are provided.
- **ELECTRONICS:**
 - Automatic, temperature compensated, pulse type charger.
 - High capacity, automatic, dust tight instantaneous transfer relay.
 - Low voltage disconnect prevents overdischarge of battery. Automatic brownout protection is provided.
 - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
 - Fused output circuit.
- **CONTROLS:**
 - Red charge monitor LED indicates state of charge of the battery.
 - Orange AC-ON LED indicates AC power is on.
 - Momentary test switch allows for quick operational check of entire system.

■ **POWER REQUIREMENTS:**
 120/277 Volt AC

battery

6 or 12 volt, long life, maintenance-free sealed lead calcium.

lamp heads

PAR 36 size, high impact mar-resistant thermoplastic heads, furnished with high intensity incandescent lamps.

Note: Optional lamps available. Specify lamp suffix from chart on pages 62-63.

options

- (Add Suffix to Model No.) Suffix
- Black housing & heads-B
 - Voltmeter (Not available with diagnostics) . .-V*
 - Ammeter (Not available with diagnostics) . .-A*
 - Disconnect Switch-DS
 - Improved Diagnostics-ID
 - Improved Diagnostics (Non-audible) . .-IDNA
 - Self Diagnostics-SD
 - Tamper Proof-TP
 - Time Delay-TD
 - 3-wire Cord & Plug3CP
 - 3-wire Cord & Plug (277V)3CP-277
- (*choose either a Voltmeter or a Ammeter)

unit selection chart:


Volts	Model No. (unit/Lamp Suffix)	Cabinet	Capacity in Watts to 87 1/2 % of Nominal Battery Voltage				Standard Lamps		
			1 1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.	Watts/ Heads	Type	Lamp Rplc. No.
6	2PQ2/L25-M	B	100	75	50	36	25	Incand.	570.0038
	2PQ3/L25-M	C	200	150	100	72	25	Incand.	570.0031
12	2P12Q1/L25-M	B	100	75	50	36	25	Incand.	570.0031
	2P12Q2/L25-M	C	200	150	107	85	25	Incand.	570.0031

accessories

- (Order as separate item) Model
- Mounting PlatformMP-PQB
 - Guard (PQ2, P12Q1)WG3

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.

ordering format

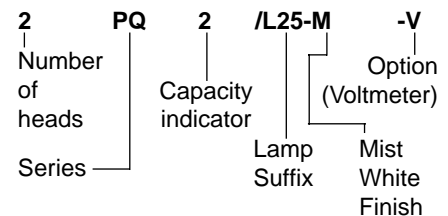

cabinet dimensions:

cabinet	A	B	C
B	16 1/8"	5 1/2"	10 1/4"
C	16 1/2"	7 1/4"	12 1/4"