





Industrial / Commercial Unit Equipment 6 Volt Lead Acid Battery

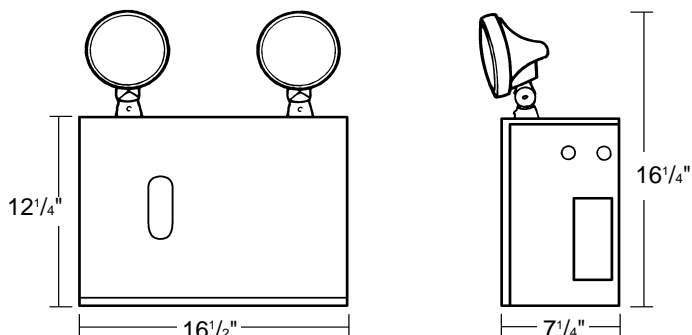

Dimensions are approximate and subject to change.

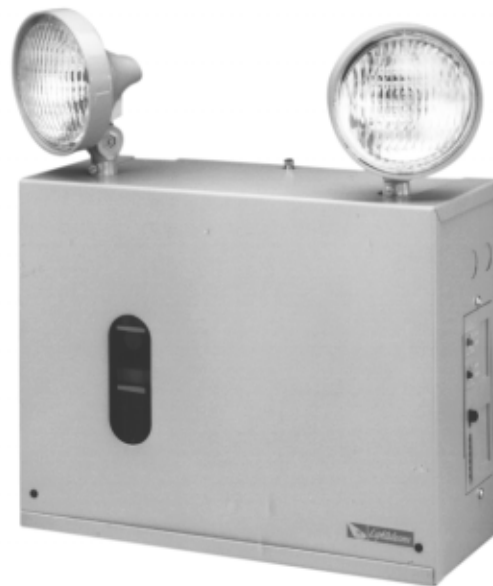

CAL#21556



LISTED

application Ideal for all industrial, commercial and institutional environments requiring extended illumination time, high capacity and remote capability. Battery has 10 year life expectancy.

features

- **HOUSING:** Heavy duty steel case with front access panel and gray enamel finish.
- **MOUNTING:** Conduit knockouts and rear keyhole mounting slots are provided. Mounting platform or bracket available.
- **ELECTRONICS:**
 - Automatic, temperature compensated, pulse type charger.
 - High capacity, automatic, dust tight instantaneous transfer relay.
 - Low voltage disconnect prevents overdischarge of battery. Automatic brown out protection is provided.
 - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
 - Two separately fused output circuits.
- **CONTROLS:**
 - Red charger monitor LED indicates state of charge of the battery.
 - Orange AC-ON LED indicates AC power is on.
 - Momentary test switch allows for quick operational check of entire system.

■ **POWER REQUIREMENTS:**
120/277 Volt AC.

battery

6 volt long life lead acid battery in transparent plastic container with visible gravity indicator.

lamp heads

PAR 36 size, high impact mar-resistant thermoplastic heads, furnished with high intensity incandescent lamps.

Note: Optional lamps available. Specify lamp suffix from chart on pages 62-63.

options


- (Add Suffix to Model No.) Suffix
- Voltmeter-V
 - Ammeter-A
 - Disconnect Switch-DS
 - Time Delay (12 min.)-TD
 - 3-wire Cord & Plug3CP
 - 3-wire Cord & Plug (277V)3CP-277

accessories

- (Order as separate item) Model
- Mounting PlatformMP-A
 - Mounting BracketMB-A
 - GuardWG3

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.

ordering format

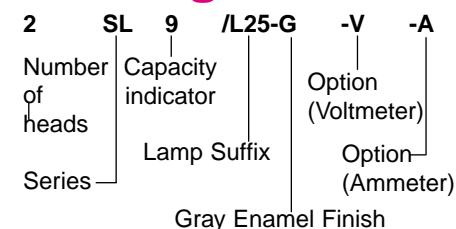

unit selection chart

Volts	Model No. (unit/Lamp Suffix)	Capacity in Watts to 87 1/2 % of Nominal Battery Voltage				Standard Lamps		
		1 1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.	Watts/Head	Type	Lamp Rplc. No.
6	2SL3/L25-G	100	80	50	40	25	Incand.	570.0038
	2SL9/L25-G	200	150	125	100	25	Incand.	570.0038
	2SL105/L25-G	200	200	175	125	25	Incand.	570.0038