


Industrial / Commercial Unit Equipment 6 Volt Nickel Cadmium Battery

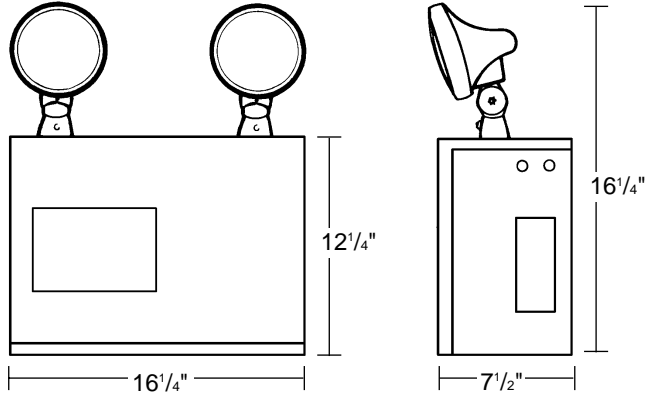

Dimensions are approximate and subject to change.

application Designed for industrial locations requiring long lasting emergency light units. Unit is available in a wide range of capacities, and offers the special advantages of the nickel cadmium battery, including excellent recharging capability and longer life span of 15 years. Nickel cadmium batteries also perform better in dramatic ambient temperature fluctuations.

features

- **HOUSING:** Heavy duty steel case with front access panel and gray enamel finish.
- **MOUNTING:** Conduit knockouts and rear keyhole mounting slots are provided. Mounting platform or bracket available.
- **ELECTRONICS:**
 - Automatic, temperature compensated, pulse type charger.
 - High capacity, automatic, dust tight instantaneous transfer relay.
 - Low voltage disconnect prevents overdischarge of battery. Automatic brownout protection is provided.
 - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
 - Two separately fused output circuits.
- **CONTROLS:**
 - Red charger monitor LED indicates state of charge of the battery.
 - Orange AC-ON LED indicates AC power is on.
 - Momentary test switch allows for quick operational check of entire system.
- **POWER REQUIREMENTS:** 120/277 Volt AC.

battery

6 volt pocket-plate nickel cadmium battery in translucent plastic cells.

lamp heads

PAR 36 size, high impact mar-resistant thermoplastic heads, furnished with high intensity incandescent lamps.

Note: Optional lamps available. Specify lamp suffix from chart on pages 62-63.

options


- (Add Suffix to Model No.) Suffix
- Voltmeter-V
 - Ammeter-A
 - Disconnect Switch-DS
 - Time Delay (12 min.)-TD
 - Thermal Jacket (120V) Utility-H1
 - Thermal Jacket (277V) Utility-H2
 - 3-wire Cord & Plug3CP
 - 3-wire Cord & Plug (277V)3CP-277

accessories

- (Order as separate item) Model
- GuardWG3
 - Mounting PlatformMP-A
 - Mounting BracketMB-A

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.

ordering format

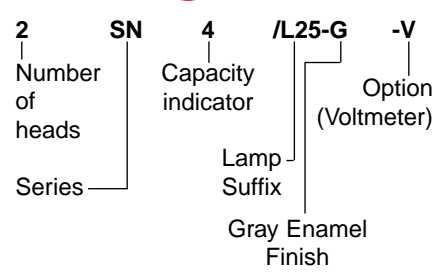

unit selection chart

Volts	Model No. (unit/Lamp Suffix)	Capacity in Watts to 87 1/2 % of Nominal Battery Voltage				Standard Lamps		
		1 1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.	Watts/Head	Type	Lamp Rplc. No.
6	2SN2/L25-G	50	45	25	18	25	Incand.	570.0038
	2SN3/L25-G	70	60	35	25	25	Incand.	570.0038
	2SN4/L25-G	100	80	50	35	25	Incand.	570.0038
	2SN6/L25-G	130	105	70	50	25	Incand.	570.0038
	2SN7/L25-G	160	130	80	60	25	Incand.	570.0038