



Industrial / Commercial Unit Equipment 12 Volt Nickel Cadmium Battery



Dimensions are approximate and subject to change.

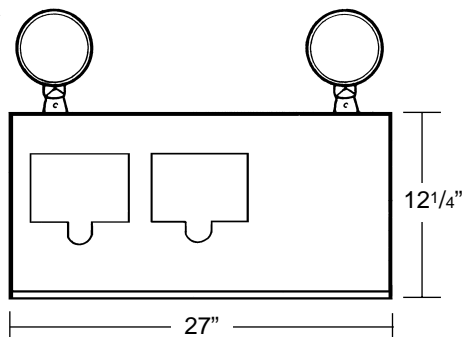

CAL#21050



LISTED

application Excellent high capacity units ideal where extended run times may be required, and/or remote fixtures or exits will be connected. Unit offers special advantages of the long life nickel cadmium battery, including excellent recharging capability, and superior performance over extended temperature ranges.

features

- **HOUSING:** Heavy duty steel case with front access panel and gray enamel finish.
- **MOUNTING:** Conduit knockouts and rear keyhole mounting slots are provided. Mounting platform or bracket available.
- **ELECTRONICS:**
 - Automatic, temperature compensated, pulse type charger.
 - High capacity, automatic, dust tight instantaneous transfer relay.
 - Low voltage disconnect prevents overdischarge of battery. Automatic brownout protection is provided.
 - Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
 - Two separately fused output circuits.
- **CONTROLS:**
 - Red charger monitor LED indicates state of charge of the battery.
 - Orange AC-ON LED indicates AC power is on.
 - Momentary test switch allows for quick operational check of entire system.
- **POWER REQUIREMENTS:** 120/277 Volt AC.

battery

12 volt high performance nickel cadmium battery in translucent plastic cells with expected life of 15 years.

lamp heads

PAR 36 size, high impact mar-resistant thermoplastic heads, furnished with high intensity incandescent lamps.

NOTE: Optional lamps available. Specify lamp suffix from chart on pages 62-63.

options


(Add Suffix to model No.)	Suffix
Voltmeter	-V
Ammeter	-A
Disconnect switch	-DS
Time delay (12 min.)	-TD
3-wire Cord & Plug3CP
3-wire Cord & Plug (277V)3CP-277

accessories

(Order as separate Item)	Model
Guard	WG4
Mounting platform	MP-12

Note: Certain option combinations may effect the UL listing. Please contact the factory for specifics.

ordering format

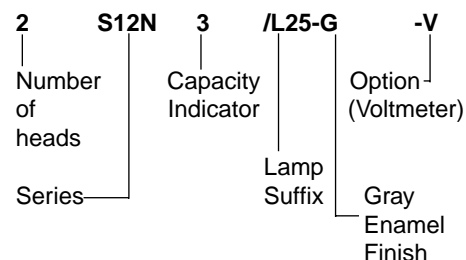

unit selection chart

Volts	Model No. (Unit/Lamp suffix)	Capacity in Watts to 87 1/2 % of Nominal Battery Voltage				Standard Lamps		
		1 1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.	Watts/ Heads	Type	Lamp Rplc. No.
12	2S12N2/L25-G	100	90	64	50	25	Incand.	570.0031
	2S12N3/L25-G	140	130	90	70	25	Incand.	570.0031
	2S12N4/L25-G	200	166	120	90	25	Incand.	570.0031
	2S12N6/L25-G	260	210	150	112	25	Incand.	570.0031
	2S12N7/L25-G	320	278	200	150	25	Incand.	570.0031