



# ELF644-FR, ELF644 SERIES

TYPE: \_\_\_\_\_

CATALOGUE #: \_\_\_\_\_

NOTES: \_\_\_\_\_

## Emergency Lighting for Remote Fixtures

ELF644



Decorative square thermoplastic light prismatic diffusing lens - metal reflector

ELF644-FR



Fully recessed metal decorator square - prismatic diffusing lens - metal reflector



semi-recessed, fully recessed or surface type

### General Information

Remote SQUARE-LITE to match SQ Series shown in the Decorative Unit Equipment. Constructed from high impact, resistant thermoplastic with metal reflector and prismatic acrylic lens.

**Finish:** Back box: Black satin (ELF644)  
Front case: Matte mist white

**Mounting:** Available for surface, or fully recessed mounting. Fully recesses into T-bar or exposed Z-spline ceilings. Supporting bars or rods supplied by others.

**Dimensions:** ELF644 plate: 9" x 9" x 4" deep  
Back box: 7 7/8" x 7 7/8" x 1 3/4" deep  
ELF644-FR: Trim plate: 9 7/8" x 9 7/8"  
Back box: 8 3/4" x 8 3/4" x 3 1/4" deep

**Lamp:** All lamps must be specified in the part number when ordering. ELF644 series may use:



- Wedge base incandescent
- Double contact Bayonet base
- Bi-pin halogen

### Standard Features

Lamp type(s), voltage and maximum wattage available for fixture are shown under lamp description. Determine lamp type, voltage and wattage required for your application, then select lamp from Lamp Chart in the Charts & Diagrams section. Do not exceed fixture wattage rating. (20 watt MAX)

Include lamp suffix and voltage as suffix to model number.  
VOLTAGE MUST BE STATED.

### Dimensions

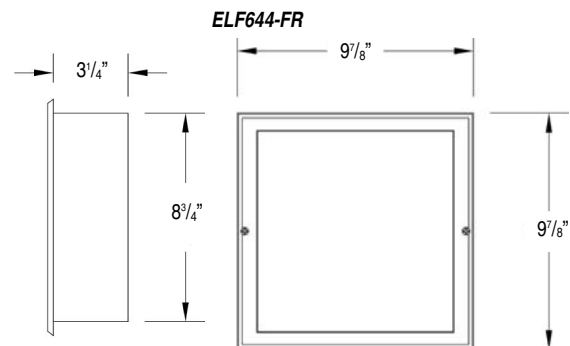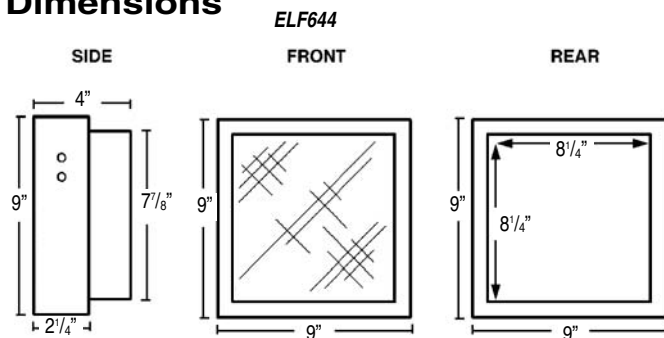

### Ordering Format

Example: ELF610L99

Series	Lamp Types	Voltage
ELF644-FR	LH4 = 6 watts	6 = 6 volt
	LH8 = 8 watts	12 = 12 volt
	L9 = 9 watts (1" HIT series chart)	24 = 24 volt
ELF644	L9 = 6 watts	6 = 6 volt
	L9 = 9 watts	12 = 12 volt
	L9 = 9 watts (1" HIT series chart)	24 = 24 volt



**Thomas & Betts**