



ELF647C, ELF647DC SERIES

TYPE: _____
 CATALOGUE #: _____
 NOTES: _____



Emergency Lighting for Remote Fixtures

Single or double lighting head with fully adjustable swivel.



General Information

UL Listed, remote lighting fixture for hazardous locations: Class 1, Division 2, Group A, B, C and D. Single or double lighting head with fully adjustable swivel; all thermoplastic construction with gasketed aluminum canopy and junction box. Tool-less aiming swivel; no more need for screwdriver.

Finish: Black plastic housing with gray junction box.

Mounting: Junctional box provided for wall mount installation. Conduit entry 1/2" NPT.

Lamps: All lamps must be specified in the part number when ordering.
 ELF647C series may use:


- Sealed beam halogen lamps
- PAR36 sealed beam, 6 volt, 12 watts or 12 volt, 12 watts

Standard Features

Lamp type(s), voltage and maximum wattage available for fixture are shown under lamp description. Determine lamp type, voltage and wattage required for your application, then select lamp from Lamp Chart in the Charts & Diagrams section. Do not exceed fixture wattage rating.

Include lamp suffix and voltage as suffix to model number. **VOLTAGE MUST BE STATED.**

Dimensions

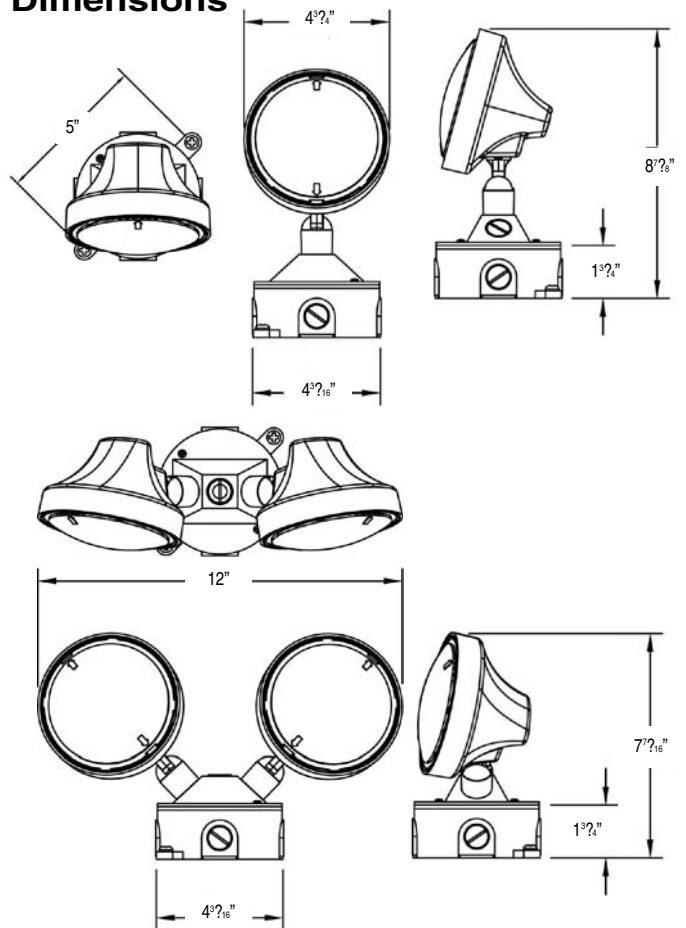

Ordering Format

Example: ELF647CH7551-B6

Series	Lamp Type	Color	Voltage
ELF647C = single	H7551 = 8 watts	-B = black	6 = 6 volt
ELF647DC = double	H7557 = 12 watts		12 = 12 volt
	H7553 = 12 watts		

