

Remote Fixture Decorative™ Series

Contemporary and enduring style



Description

- Indoor use
- Die cast aluminum construction

Finish

Powder-coated off-white, black or brushed nickel

Lamp type

Choice of MR16 LED lamp wattages

Mounting

- Recessed Mount
- Must order appropriate housing with decorative head selection for installation into new construction ceiling (LU-GRHR03) or non-insulated ceiling (LU-GRHR05) GU10 or Insulated ceiling (LU-GRHR06)

Approval

UL 924 Listed


Warranty (subject to proper installation and maintenance)

Unit: three-year full warranty

Detailed warranty terms located on [page 197](#) or online at: www.lightalarms.com




Series


	RSTH18R: concave (egress/ regress)	Description: Decorative lighting head Dimensions: 4.0" diameter base Color Suffix: -WH = White or -BN = Brushed Nickel, -BK= Black
	RSTH19: pop-out	Description: Decorative lighting head Dimensions: 4.0" diameter base Color Suffix: -WH = White, -BK= Black
	LU-GRHR03	Housing Enclosure Description: New construction housing Dimensions: 5.6" x 14.24"
	LU-GRHR05	Housing Enclosure Description: New construction housing New construction housing for GU10 (MR16 120V)
	LU-GRHR06	Housing Enclosure Description: Insulated ceilings housing Dimensions: 7.25" x 14.24"

Photometric performance


Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	43'	36'
LD2	81'	64'
LD7	55'	43'
LD9	71'	56'
LD10	100'	85'
LD13	56'	44'
LD14	100'	85'
LD26	43'	39'

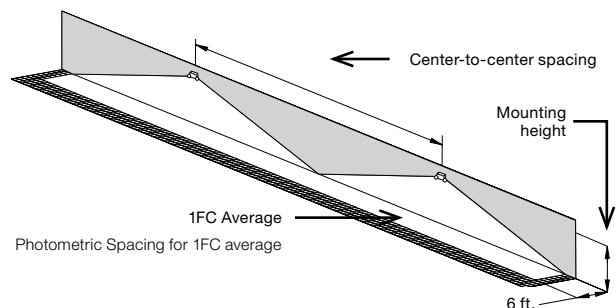


Dimensions (Dimensions are approximate and subject to change)

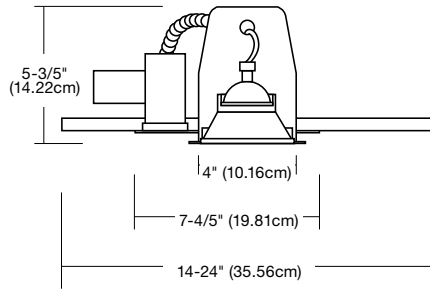

LU-GRHR03

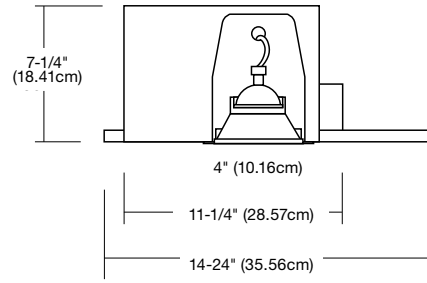

LU-GRHR06

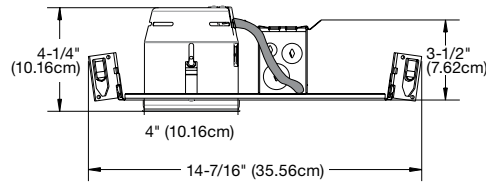

LU-GRHR05

Lamp selection chart – MR16 LED lamps

Lamp suffix	Voltage	Wattage	Lumens	Replacement #
LD1	6	4	130	580.0097-L
LD2	6	5	415	580.0122-L
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0098-L
LD10	12	6	540	580.0106-L
LD13	24	4	200	580.0104-L
LD14	24	6	590	580.0100-L
LD26	120	4	200	580.0113-L

Ordering format

Series	Lamp suffix	Color	Voltage
RSTH18R	/ _____ ¹	WH = White	6 = 6 VDC
RSTH19		-BK = Black	12 = 12 VDC
		-BN = Brushed nickel (available with RSTH18R only)	24 = 24 VDC
			120 = 120 VAC/VDC

Example: RSTH18R/LD9-WH and LU-GRHR03

With Housing Enclosure Example: LU-GRHR06 (for Insulated Ceiling installation)

¹ Choose from lamp selection chart