

## PN LED Battery Series 3.6V Steel Enclosure



Ideal for spaces that require a highly efficient LED emergency lighting unit with 2 or 3 lighting heads and a steel enclosure. Each lamp head provides 150 lumens.

### Housing

- Constructed of 20 gauge heavy-duty steel and a durable white powder-coat finish
- The 3PN-LED unit is furnished with 3 (1.5W LED) heads and the 2PN-LED unit is furnished with 2 (1.5W LED) heads
- Each head provides 150 lumens output

### Electronics

- 120V/277V Input standard
- Low voltage disconnect prevents over discharge of battery
- Brownout protection standard
- Long-life maintenance-free battery
- 3.6V nickel-cadmium battery

### Approvals

- UL 924 Standard
- Complies with NEC, Life Safety Code and OSHA.


### Warranty (subject to proper installation and maintenance)

- Unit has a three year full warranty (excluding lamps and fuses)
- Nickel-cadmium battery has a five year full, plus five year pro-rata warranty

Detailed warranty terms located [online at: www.lightalarms.com](http://www.lightalarms.com)



### Dimensions (Dimensions are approximate and subject to change):

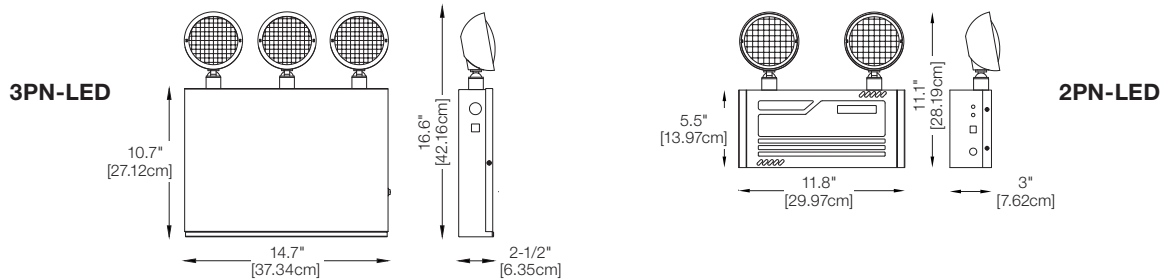

### Power consumption chart

Series	Battery type	DC specs		AC specs
		DC voltage	Units dual voltage <sup>1</sup>	Current maximum
2PN-LED	Nickel-cadmium	3.6V	120VAC/277VAC	120mA
3PN-LED		3.6V		150mA

<sup>1</sup>All units 120/277 dual voltage, information based on wiring to specific voltage type

### Ordering format

Series	Description
2PN-LED	2 X 1.5W LED heads
3PN-LED	3 X 1.5W LED heads

**Example: 2PN-LED**