

## WLC Series

Compact wet location combination exit sign

EXIT SIGNS



### Housing

- Thermoplastic housing
- Standard off-white finish
- Universal faces (2 faceplates, 1 backplate)

### Mounting

- End mount
- Wall mount
- Universal J-box mounting
- Canopy included

### Type of battery


- NI-MH Battery 3.6V 1500mAh

### Lamp head source

- 1W white LED, 100 lumens

### Photometric performance

Spacing center-to-center (feet)	
7' mounting height	15' mounting height
28.5'	22.25'

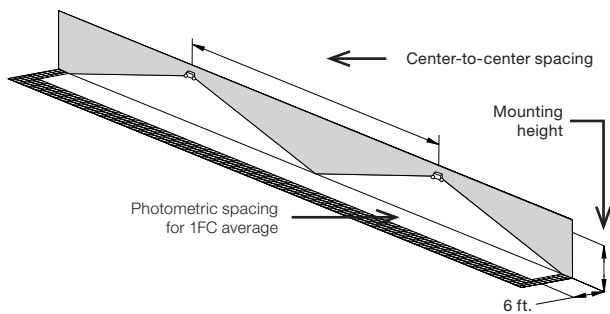

### Power consumption chart

Model	Current (A) / Power (W)
	120/277VAC, 60Hz
WLC-2R	0.074/4.5
WLC-2G	0.078/4.5

### Electronics

- 120/277V, 50/60Hz
- Test switch and charge indicator

### Approvals

- UL 924 listed
- Wet location -13°F to 104°F (-25°C to 40°C)
- UL 94 V-0 flame rating, fire-resistant
- IP65 rated
- Meets NEMA 3R specifications


### Warranty (subject to proper installation and maintenance)

- Unit has a three year limited warranty

Detailed warranty terms located at: [www.lightalarms.com](http://www.lightalarms.com)



### Dimensions (Dimensions are approximate and subject to change):

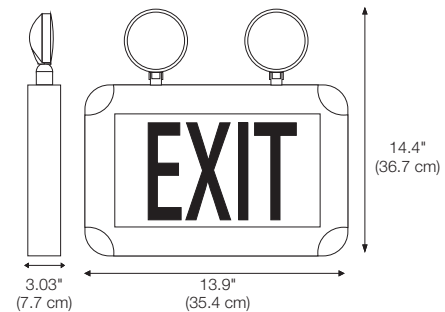

### Ordering format

Series	Lamp	Options
WLC= Combination sign	-2= 2 LED heads	R= Red G= Green
<b>Example: WLC-2R</b>		