

WLE Series

Compact wet location exit sign



Housing

- Thermoplastic housing
- Standard off-white finish
- Universal faces (2 faceplates, 1 backplate)

Mounting

- Ceiling mount
- Wall mount
- End mount
- Universal J-box mounting
- Canopy included

Type of battery

- NI-MH Battery 3.6V 1500mAH

Electronics

- 120/277V, 50/60Hz
- Test switch and charge indicator

Approvals

- UL 924 listed
- Wet location -4°F to 104°F (-20°C to 40°C)
- UL 94 V-0 flame rating, fire-resistant
- IP65 rated
- Meets NEMA 3R specifications

Warranty (subject to proper installation and maintenance)

- Unit has a three year limited warranty


Detailed warranty terms located at: www.lightalarms.com



Power consumption chart

Model	Current (A) / Power (W)
	120/277VAC, 60Hz
WLEACR	0.05/2.8
WLEACG	0.05/2.8
WLESPR	0.065/4.5
WLESPG	0.065/4.5

Dimensions (Dimensions are approximate and subject to change):

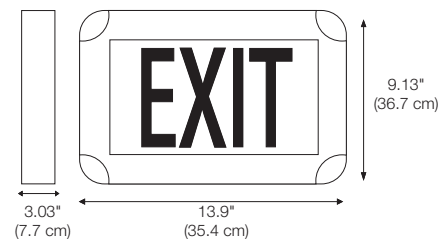

Ordering format

Series	Series	Options
WLE= Exit sign	AC= AC only	R= Red
Example: WLEACR	SP= Self-powered	G= Green