



# LAMM Series

Mullion mount LED fixture

NEW

## Housing

- Extruded aluminum enclosure
- UV-resistant silver powder-coated paint
- Lamp head can be adjusted and fixed at angles from 0° to 180°

## Mounting


- Ceiling, surface, and wall mount
- Waterproof junction box included
- Indoor/outdoor; suitable for wet locations
- Maximum mounting height: 10 feet from floor

## Electrical

- Dual-function fixture: normally ON or emergency operation (-SP option required for emergency mode, see next page)

### Dimensions

Dimensions are approximate and subject to change.

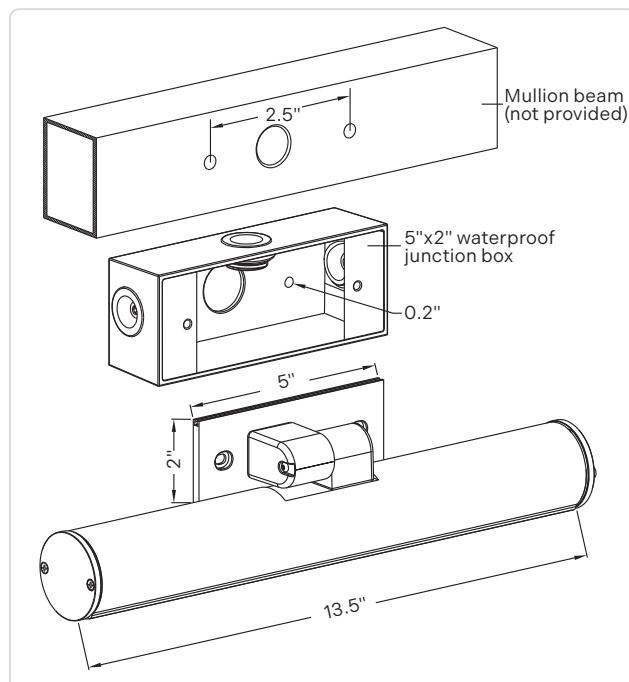

• **AC Mode:** 120-277 VAC, 60Hz

• **DC Mode:** 6-24 VDC

• **AC power consumption:** 10W

• **CRI:** 80+

• **Color temperature:** 4000K

• **Performance:**

AC Mode: 1000 lumens


DC Mode: 900 lumens

## Approvals

- cULus listed
- IP66 rated
- IK10 rated
- Wet location -22°F to 122°F (-30°C to 50°C)



### Photometric performance

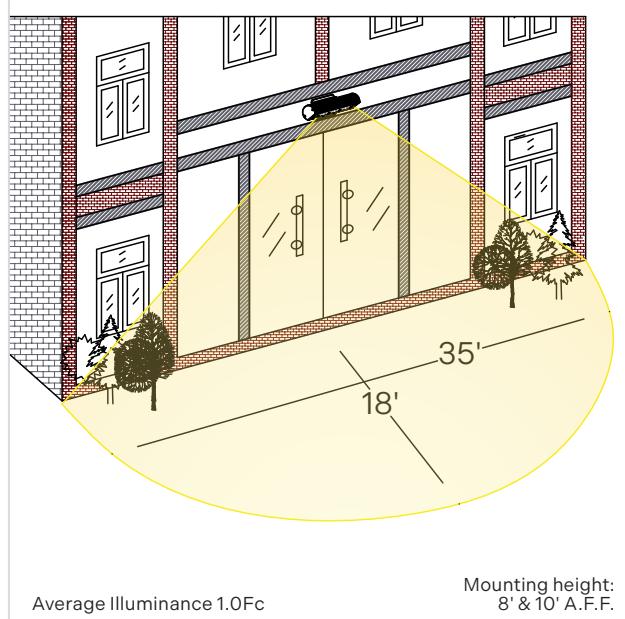

# LAMM Series (continued)

Mullion mount LED fixture

**NEW**



## Emergency power supply (included with **-SP** option)

### Housing

- Extruded aluminum housing
- UV-resistant silver powder-coated paint
- Button and LED indicator on exterior faceplate for manual testing of the mullion mount in emergency mode

### Mounting

- Direct mounting into 3 gang masonry or 3 gang cable box (not included)
- For indoor use only

### Electrical

- AC Input:** 120-277 VAC, 60Hz
- DC Output:** 6-24 VDC Max 1.5A
- Overload/short circuit protection
- LiFePO4 battery

### Approvals

- UL 924 listed
- Damp location 41°F to 122°F (5°C to 50°C)




#### Emergency power supply maximum wire length to fixture

AWG wire size	Wire length
18 gauge	20 feet
16 gauge	26 feet



### Dimensions

Dimensions are approximate and subject to change.

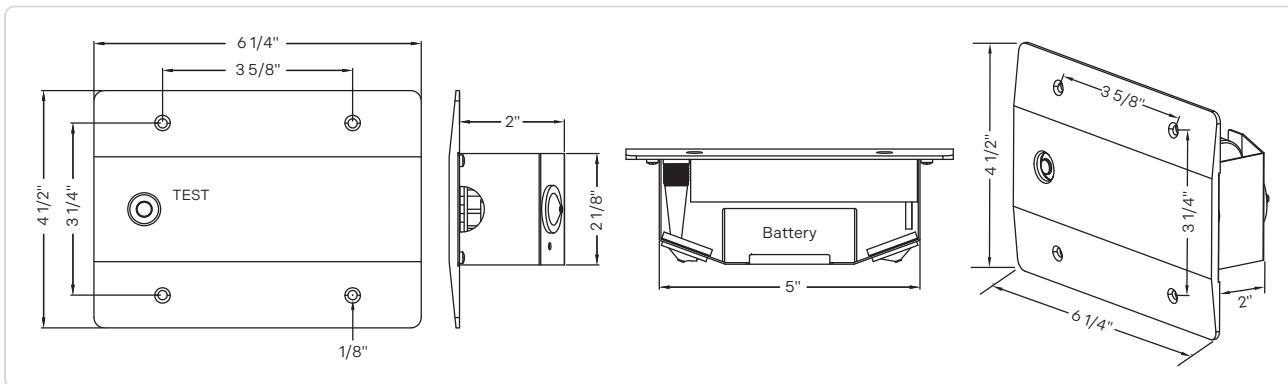

### How to order

#### Series

**LAMM**= Mullion mount LED fixture

#### Options

**-ACDC**= 120-277 VAC 60Hz and 6-24 VDC

**-SP**= With emergency power supply