




Galaxy
SERIES

Self-Contained LED
Die Cast Aluminum
AC, AC/DC, or Self-Powered
Exit Signs

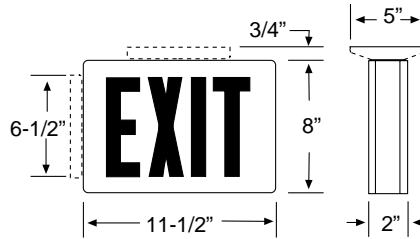

Dimensions are approximate and subject to change.



AC Only and Self-Powered models now use the same Housing and Low Profile Canopy

diagnostic / self test feature (standard)

The diagnostic/self test feature continuously monitors the charger assembly, battery and LED assembly current. If a fault is indicated the external service required indicator will illuminate. The internal fault indicators will then indicate the nature of the fault. The diagnostic/self test will self test for 30 seconds every 30 days, 30 minutes every 60 days and 90 minutes annually. Meets NFPA 101 Life Safety Code requirements for periodic testing.

features

- Precision die cast aluminum housing features invisible, universal chevron and mounting knockouts.
- All signs feature a 120-347 2-wire universal AC input
- High intensity LED's with diffuser disperses light and enhances brightness for a fully even illuminated 3/4" stroke.
- LED's draw only 2 watts of electricity for either single or double face signs.
- Low profile mounting canopy included with all exit signs for universal top, end or back mount.
- All AC only signs come wired as AC/DC signs which operate off a remote DC power source when AC power fails. DC input is a 2-wire, 6-48VDC universal input

self-powered units

- **Self-Powered Models are self contained, all circuitry and batteries are contained inside the exit housing.**
- Fully integrated circuitry includes a 2-wire 120-347VAC voltage input transformer, automatic, temperature compensated charger, charge monitor LED and test switch.
- Long life, maintenance-free, sealed nickel cadmium battery
- **Diagnostic/Self Testing Standard:** Continuously monitor every critical function of the unit.

options

(Add Suffix to Model No.)

	Suffix
Dual circuit (AC only)	-2
Vandal Resistant Screws	-VR
Lexan Face Shield with Vandal Resistant Screws	-LVR
Fire Alarm Activated Flasher (Self-powered signs only)	-FAF
Buzzer and Flasher (Self-powered signs only)	-FB
Open Face / Special Wording	-Y
Custom Colors and Finishes are available upon request	

accessories (Order as separate item)

	Model
12" pendant, white	GS-PW
12" pendant, black	GS-PB

ordering format

2XLED	A	R	A	-VR	-N
Series (Double Face LED Self- Powered Exit)	Housing Color (Brushed Aluminum)	Letter Color (Red)	Stencil Color (Brushed Aluminum)	Option (Vandal Resistant Screws)	Standard Series Designator

selection chart - ac only signs

Series		Housing Colors		Letter/Stencil Colors	
Description	Symbol	Description	Symbol	Description	Symbol
Single Face	XLD □	Black	B □	Red/Black	RB □
		White	W □	Green/Black	GB □
Double Face	2XLD □	Brushed Aluminum	A □	Red/White	RW □
				Green/White	GW □
		Green/Brushed Aluminum	Red/Brushed Aluminum	RA □	
			Green/Brushed Aluminum	GA □	

selection chart - self-powered signs

Series		Housing Colors		Letter/Stencil Colors	
Description	Symbol	Description	Symbol	Description	Symbol
Single Face	XLED □	Black	B □	Red/Black	RB □
		White	W □	Green/Black	GB □
Double Face	2XLED □	Brushed Aluminum	A □	Red/White	RW □
				Green/White	GW □
		Green/Brushed Aluminum	Red/Brushed Aluminum	RA □	
			Green/Brushed Aluminum	GA □	