


Remote Capacity Canopy

Galaxy
SERIES

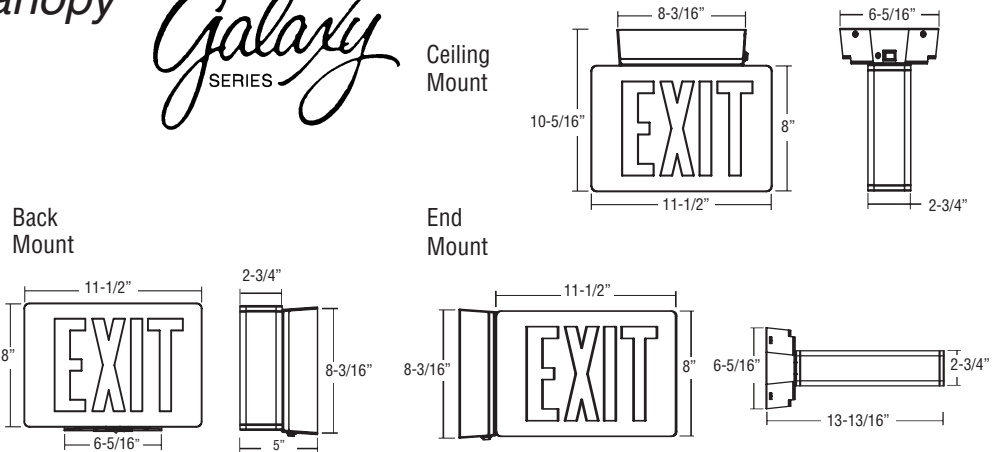

diagnostic / self test feature (optional)

The diagnostic/self test feature continuously monitors the charger assembly, battery, LED assembly current, and remote load (if connected). If a fault is detected, visual, LED indications illuminate, eliminating the need to isolate the fault by troubleshooting. An audible alarm indicator is optional. The self-test circuitry meets the periodic testing requirements of NFPA 101, Life Safety Code.

features

- Precision die cast aluminum housing with pre-scored chevrons and mounting knockouts.
- All signs are 120/277 VAC, dual-voltage input ready, 60 Hz.
- Low power consumption LED illuminate the sign in the normal and emergency modes.

battery types

- PCL-Sealed, maintenance-free lead calcium battery with 9-watts remote capacity
- PCN-Sealed, maintenance-free nickel metal hydride battery with 12-watts remote capacity
- PCX- Sealed, maintenance-free nickel metal hydride battery with 24-watts remote capacity

mounting

- Exit signs may be ceiling, end, or back mounted to the power canopy. The power canopy surface mounts directly to the junction box (supplied by others).

options

Description	Suffix
Improved Diagnostics	..ID
Improved Diagnostics, non-audible	..IDNA
Time Delay (specify 5, 10 or 15 minutes)	..TD
Flasher - Buzzer (emergency mode operation)	..FB
Fire Alarm Activated Flasher (Self-powered model only)	..FAF
Damp Location Listed	..DL
Vandal Resistant Screws	..VR
Vandal Resistant Shield and Screws	..LVR

Accessories (order as a separate item)

12" White Pendant	..GS-PW
12" Black Pendant	..GS-PB

application flexibility

Lead Calcium Models (PCL) -Sealed, maintenance-free lead calcium batteries power the exit sign for an estimated period of 20+ hours minimum with no remote load or 90-minutes run time with 9 watts remote load.

Nickel Metal Hydride Models (PCN) -Sealed, maintenance-free nickel metal hydride batteries power the exit sign for an estimated period of 20+ hours minimum with no remote load or 90-minutes run time with 12 watts remote load.

Nickel Metal Hydride Models (PCX) -Sealed, maintenance-free nickel metal hydride batteries power the exit sign for an estimated period of 40+ hours minimum with no remote load or 90-minutes run time with 24 watts remote head.

ordering format

2XL	PCN	W	RW	ID
Series	Battery Type	Housing	Legend/	Options
(Double Face	(Nickel Metal	Color	Face Color	(Improved
LED Exit)	Hydride, 12 watts	(White)	(Red on	Diagnostics)
	Remote)		White)	

selection chart - self-powered signs

Series		Battery Type		Housing Colors		Letter/Stencil Colors	
Description	Symbol	Description	Symbol	Description	Symbol	Description	Symbol
Single Face	XL □	Sealed lead calcium, 9 watts	PCL □	Black	B □	Red/Black	RB □
Double Face	2XL □	Sealed nickel metal hydride, 12 watts	PCN □	White	W □	Green/Black	GB □
		Sealed nickel metal hydride, 24 watts	PCX □	Brushed Aluminum	A □	Red/White	RW □
						Green/White	GW □
						Red/Brushed Aluminum	RA □
						Green/Brushed Aluminum	GA □