

■ Surface Mounted Remote Series



ELF2, ELF2D

Wattage doubles for "D" 2-lamp version



□ ELF2, ELF2D

DESCRIPTION: Single or double PAR18 size indoor lighting head with fully adjustable swivel; all thermoplastic construction.

FINISH: Mist White (-M), Black (-B)

MOUNTING: Surface (wall or ceiling) direct 4" octagonal or single-gang box

DIMENSIONS: 5" diameter base, 5-9/16" height (single head)

LAMPS: Wedge base incandescent • Bi-pin halogen

VOLTS: 6, 12 or 24 volt

MAXIMUM WATTS: 18 watts

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF2 (Single Head)	/ _____ - _____	_____	_____
ELF2D (Double Head)	/ _____ - _____	_____	_____



ELF3, ELF3D

Wattage doubles for "D" 2-lamp version



□ ELF3, ELF3D

DESCRIPTION: Single or double MR16 size indoor lighting heads with fully adjustable swivel. All thermoplastic construction.

FINISH: Mist White (-M), Black (-B)

MOUNTING: Direct to 4" octagonal electrical box

DIMENSIONS: 5" diameter base, 5-1/8" height (single head)

LAMPS: MR16

VOLTS: 6 or 12 volt

MAXIMUM WATTS: 20 watts

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF3 (Single Head)	/ _____ - _____	_____	_____
ELF3D (Double Head)	/ _____ - _____	_____	_____



ELF603



□ ELF603

DESCRIPTION: Surface rectangular fixture with diffusion lens and welded steel housing.

FINISH: White baked enamel

MOUNTING: Surface (wall or ceiling). Knockouts provided on 2 sides and back.

DIMENSIONS: Trim ring- 8-1/4" X 4-1/2" X 3" deep

Back box- 6-1/2" X 3 X 2-5/8" deep

LAMPS: Double contact bayonet base

VOLTS: 6, 12, 24, 36 or 120V

MAXIMUM WATTS: 18 watts

Remote Fixture Model #	Lamp Suffix	Voltage
ELF603	/ _____ - _____	_____



ELF622, ELF622D

Wattage doubles for "D" 2-lamp version



□ ELF622, ELF622D

DESCRIPTION: Single or double PAR36 size indoor lighting heads with fully adjustable swivel to 358°. All aluminum construction.

FINISH: Satin Aluminum (Blank), Mist White (-M), Black (-B) or Chrome (-CH)

MOUNTING: Direct to 4" octagonal electrical box.

DIMENSIONS: Single head: 5-1/8" diameter base, 8-1/2" height.

Double head: 5" diameter base, 6-1/2" height.

ELF622: Mounting plate 2-1/2" X 4-1/4"

ELF622D: Mounting plate 6-7/16" X 4-1/2"

LAMPS: Double contact bayonet base • V

• PAR36 sealed beam.

VOLTS: 6, 12, 24, 36 or 120 volt

MAXIMUM WATTS: 25 (10 watts for 120V)

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF622 (Single Head)	/ _____ - _____	_____	_____
ELF622D (Double Head)	/ _____ - _____	_____	_____

▣ ELF623, ELF623D

DESCRIPTION: Single adjustable decorative lighting head - all thermoplastic construction.

FINISH: Mist White (-M), Black (-B)

MOUNTING: Direct to 4" octagonal or single-gang box round mounting canopy standard.

LAMPS: Wedge base incandescent • Bi-pin halogen

VOLTS: 6 or 12 volt

MAXIMUM WATTS: 18 watts per head

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF623 (Single Head)	/ ____ - ____	____	____
ELF623D (Double Head)	/ ____ - ____	____	____



ELF623, ELF623D

Wattage doubles for "D" 2-lamp version

▣ ELF644, ELF644D

DESCRIPTION: Remote SQ SQUARE-LITE to match SQ, SQ-D Series shown on page 18. Constructed from high impact, mar-resistant thermoplastic with plated steel reflector and prismatic acrylic lens.

FINISH: Back box: Black satin; Front case: White

MOUNTING: Available for surface, semi-recessed (order SQR kit), or fully recessed (order FSQR kit) mounting. Fully recesses into T-bar or exposed Z-spline ceilings. Supporting bars or rods supplied by others.

DIMENSIONS: 9" X 9" X 4" deep

LAMPS: Bi-pin halogen • Wedge base incandescent

VOLTS: 6 or 12 volt

MAXIMUM WATTS: 14 watts per lamp

Remote Fixture Model #	Lamp Suffix	Voltage
ELF644 (Single Lamp)	/ ____ - ____	____
ELF644D (Double Lamps)	/ ____ - ____	____



ELF644, ELF644D

Wattage doubles for "D" 2-lamp version

▣ ELF645, ELF645D, ELF645T

DESCRIPTION: Single, double or triple PAR36 size lighting head with fully adjustable swivel, all thermoplastic construction.

FINISH: Mist White (-M), Gray (-G) or Black (-B)

MOUNTING: Standard with round plate for mounting directly to 4" outlet box (4-gang plate for ELF645D optional).

LAMPS: Double contact bayonet base • PAR36 sealed beam.

VOLTS: 6, 12, 24, 32 or 120 volt

MAXIMUM WATTS: 25 watts per head

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF645 (Single Head)	/ ____ - ____	____	____
ELF645D (Double Head)	/ ____ - ____	____	____
ELF645T (Triple Head)	/ ____ - ____	____	____



ELF645, ELF645D, ELF645T

Wattage doubles for "D" 2-lamp version and triples for "T" 3-lamp version.

▣ ELF648, ELF648D

DESCRIPTION: Single or double miniature cylinder with satin aluminum housing and mounting plate and fully adjustable chrome swivel. Mirror finished reflector with prismatic lens assures a wide-beam with even light distribution.

FINISH: White (-M), Black (-B)


MOUNTING: Direct to 4" octagonal electrical box

LAMPS: Bi-Pin halogen

VOLTS: 6 or 12 volt

MAXIMUM WATTS: 12 watts per head

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF648 (Single Head)	/ ____ - ____	____	____
ELF648D (Double Head)	/ ____ - ____	____	____

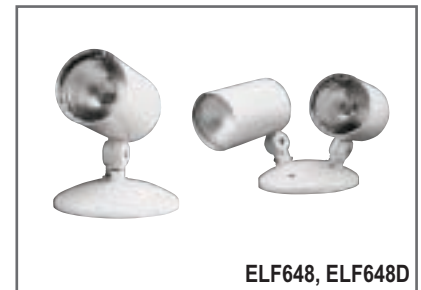

ELF648, ELF648D

Wattage doubles for "D" 2-lamp version