

TYPE _____
 CATALOG # _____

 NOTES _____

REMOTE FIXTURE SAF-T-RAY™ SERIES

Wall Mount Remote Head for
Damp and Wet Locations



FEATURES

Description

- Indoor or Outdoor use
- Double MR16 size lighting head
- Die-Cast aluminum construction
- Fully gasketed cover available with (optional) Tamper Proof Screws
- Adjustable tool-less aiming swivel head rotates side to side and tilts in and out
- Impact- and tamper-resistant polycarbonate diffuser maximizes light output

Finish

- Mist white, black or dark gray

Mounting


- Surface Wall Mount
- Universal knock-outs for mounting to a standard 4" octagonal electrical box

Approval

- UL Listed
- NEMA-3R

DIMENSIONS

Dimensions are approximate and subject to change.

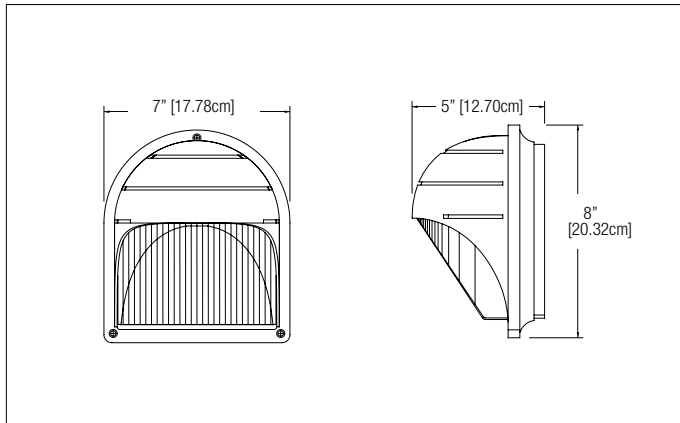

LAMP SELECTION CHART

| MR 16 HALOGEN LAMPS | | | | |
|---------------------|---------|---------|--------|---------------|
| LAMP SUFFIX | VOLTAGE | WATTAGE | LUMENS | REPLACEMENT # |
| M5 | 6 | 5 | 34 | 580.0072-L |
| M6 | 6 | 6 | 40 | 580.0074-L |
| M10 | 6 | 10 | 74 | 580.0079-L |
| M10 | 12 | 10 | 84 | 580.0099-L |
| M12 | 12 | 12 | 80 | 580.0080-L |
| M20 | 12 | 20 | 150 | 580.0064-L |
| MH20 | 12 | 20-H | 400 | 580.0068-L |
| M12 | 24 | 12 | 82 | 580.0070-L |
| M20 | 24 | 20 | 240 | 580.0077-L |
| M20 | 120 | 20 | 100 | 580.0065-L |

| MR 16 LED LAMPS | | | | |
|-----------------|---------|---------|--------|---------------|
| LAMP SUFFIX | VOLTAGE | WATTAGE | LUMENS | REPLACEMENT # |
| LD1 | 6 | 4 | 130 | 580.0097-L |
| LD7 | 12 | 4 | 170 | 580.0093-L |
| LD9 | 12 | 5 | 340 | 580.0098-L |
| LD10 | 12 | 6 | 540 | 580.0106-L |
| LD13 | 24 | 4 | 200 | 580.0104-L |
| LD25 | 120 | 4 | 200 | 580.0095-L |

ORDERING FORMAT

| SERIES | LAMP SUFFIX | COLOR | VOLTAGE | OPTIONS |
|-----------------------------------|---|---|--|--|
| SAF-2= Double lamp remote fixture | / _____ ¹ | -M= Mist White -B= Black -DG= Dark Gray -DB= Dark Bronze | 6= 6 VDC 12= 12 VDC 24= 24 VDC 120= 120 VAC/VDC | -VR= Vandal resistant screws -C= Clear lens |
| | ¹ Choose from lamp selection chart | | | |

EXAMPLE: SAF-2/M6-M6