

Available Mounted on:

- TBR Series • RD Series • S12E Series • MG & MN Series
- PG & P12G Series • PN & P12N Series • PQ & P12Q Series



REMOTE HEAD & UNIT HEAD ELF2 SERIES

Thermoplastic Par 18 size lamp head
Suitable for MRI room



TYPE _____

CATALOG # _____

NOTES _____

FEATURES

Description

- Indoor Use
- Available as a single, double or triple Par 18 size lighting head
- Thermoplastic construction
- Fully adjustable tool-less aiming swivel head
- Specular parabolic reflector and prismatic lens for wide-beam, even light distribution
- Snap out lens for easy lamp replacement.

Finish

- Mist white or black

Mounting


- Surface Mount
- Includes a 5" round universal canopy plate with 3 knockouts (supplied with 2 plugs) for use with single, double or triple head mounting.
- Mounts to either a standard 4" octagonal or a single gang electrical box. (4-gang plate for ELF2D optional).

Approval

- UL Listed

DIMENSIONS

Dimensions are approximate and subject to change.

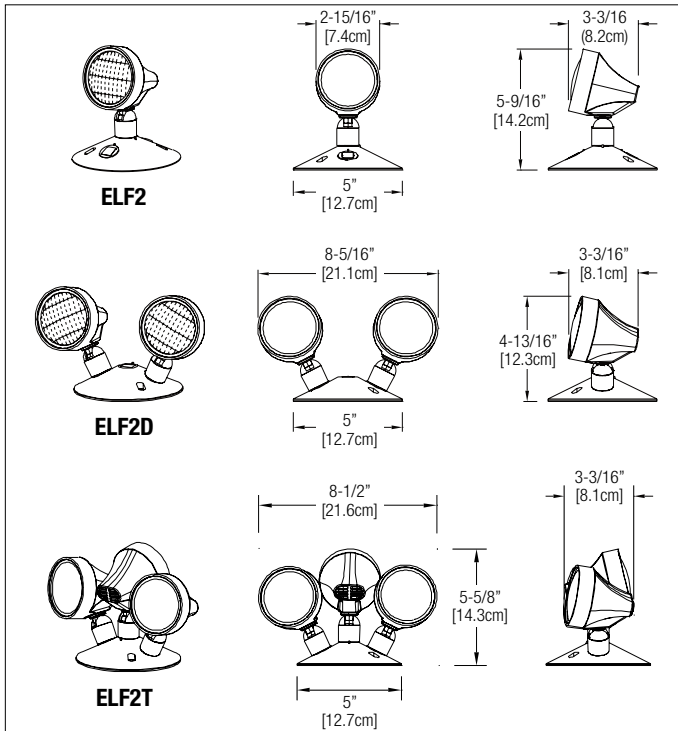

LAMP SELECTION CHART

WEDGE BASE INCANDESCENT LAMPS				
LAMP SUFFIX	VOLTAGE	WATTAGE	LUMENS	REPLACEMENT #
L5	6	5.4	68	570.0012-L
L7	6	7.2	100	570.0026-L
L9	6	9	150	570.0016-L
L9	12	9	138	570.0025-L
L12	12	12	150	570.0028-L
L18	12	18	264	570.0029-L
L9	24	9	113	570.0045-L
L18	24	18	239	570.0046-L

BI-PIN HALOGEN LAMPS				
LAMP SUFFIX	VOLTAGE	WATTAGE	LUMENS	REPLACEMENT #
LH4	6	6	113	580.0012-L
LH5	6	8	163	580.0013-L
LH7	6	10	201	580.0017-L
LH6	6	12	239	580.0011-L
LH8	12	8	163	580.0014-L
LH3	12	12	276	580.0015-L
LH9	12	14	302	580.0016-L

ORDERING FORMAT

SERIES	# OF HEADS	LAMP SUFFIX	COLOR	VOLTAGE	OPTION
ELF2= Par18 head	B lank= Single head D = Double heads T = Triple heads	/ _____ ¹	M = Mist White B = Black	6 = 6 VDC 12 = 12 VDC 24 = 24 VDC	AL = Aluminum hardware, suitable for MRI application ¹
					¹ Wedge base lamps only

EXAMPLE: ELF2/LH5-M6