



TYPE _____

CATALOG # _____

NOTES _____

REMOTE FIXTURE DECORATIVE™ SERIES

Contemporary and Enduring Style

FEATURES

Description

- Indoor Use
- Powder-coated die cast aluminum construction
- Tool-less lamp head adjust ability
- Glass MR16 lamp lens
- Choice of MR16 Halogen or LED Lamp

Finish



- Choice of White, Black, Chrome, Brushed Nickel or Polished Brass

Mounting

- Recessed Ceiling Mount
- Must order appropriate housing with Decorative head selection for installation into new construction ceiling (LU-GRHR03) or Non-Insulated ceiling (LU-GRHR05) GU10 or Insulated ceiling (LU-GRHR06)

DIMENSIONS

Dimensions are approximate and subject to change.

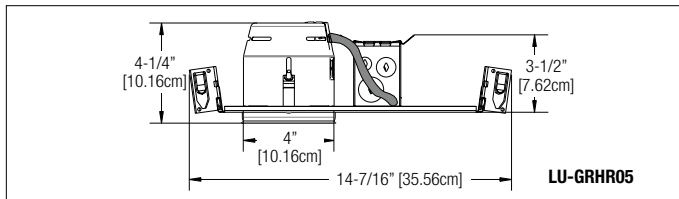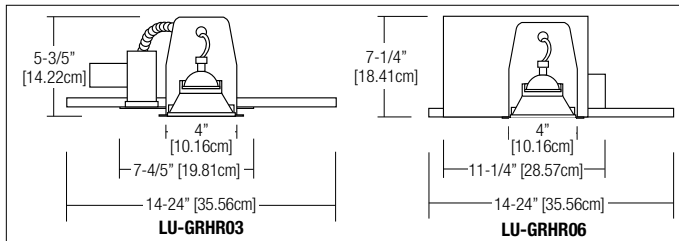

SERIES

	RSTH24: flat (tilting round front load)	Description: Decorative lighting head Dimensions: 4.0" diameter base Color Suffix: -WH= White, -BK= Black, -CH= Chrome, -PB= Polished brass, -BN= Brushed Nickel
	RSTH18: concave (tilting round rear load)	Description: Decorative lighting head Dimensions: 4.0" diameter base Color Suffix: -WH= White or -BN= Brushed Nickel
	RSTH18R: concave (egress/regress)	Description: Decorative lighting head Dimensions: 4.0" diameter base Color Suffix: -WH = White or -BN = Brushed Nickel
	RSTH19: pop-out	Description: Decorative lighting head Dimensions: 4.0" diameter base Color Suffix: -WH = White
	LU-GRHR03	Housing Enclosure Description: New construction housing Dimensions: 5.6" x 14.24"
	LU-GRHR05	Housing Enclosure Description: New construction housing New construction housing for GU10 (MR16 120V)
	LU-GRHR06	Housing Enclosure Description: Insulated ceilings housing Dimensions: 7.25" x 14.24"

LAMP SELECTION CHART

MR 16 HALOGEN LAMPS				
LAMP SUFFIX	VOLTAGE	WATTAGE	LUMENS	REPLACEMENT #
M5	6	5	34	580.0072-L
M6	6	6	40	580.0074-L
M10	6	10	74	580.0079-L
M10	12	10	84	580.0099-L
M12	12	12	80	580.0080-L
M20	12	20	150	580.0064-L
MH20	12	20-H	400	580.0068-L
M35	12	35	430	580.0083-L
MH35	12	35-H	830	580.0090-L
MH31	12	37-H	900	580.0088-L
M50	12	50	700	580.0076-L
MH50	12	50-H	1460	580.0089-L
M12	24	12	82	580.0070-L
M20	24	20	240	580.0077-L
MA20	24	20-A	220	580.0094-L
M35	24	35	235	580.0084-L
M50	24	50	670	580.0076-L
M20 (GU10)	120	20	100	580.0065-L
M35 (GU10)	120	35	230	580.0066-L

MR16 LED LAMPS				
LAMP SUFFIX	VOLTAGE	WATTAGE	LUMENS	REPLACEMENT #
LD1	6	4	130	580.0097-L
LD7	12	4	170	580.0093-L
LD9	12	5	340	580.0098-L
LD10	12	6	540	580.0106-L
LD13	24	4	200	580.0104-L
LD26	120	4	200	580.0113-L
LD14	24	6	590	580.0100-L

MR16 LED LAMPS COMPATIBILITY CHART						
HEAD STYLE	6V-4W	12V-4W	24V-4W	12V-5W	12V-6W	120V-4W
RSTH18	X	X	X	-	-	-
RSTH18R	X	X	X	X	X	X
RSTH19	X	X	X	X	X	X
RSTH24	-	-	-	-	-	-

ORDERING FORMAT

(Must also order Housing Enclosure based on Ceiling Type, sold separately)

SERIES	LAMP SUFFIX	COLOR	VOLTAGE
RSTH24	/ _____ ¹	-WH= White	6= 6 VDC
RSTH18		-BK= Black (available with RSTH24 only)	12= 12 VDC
RSTH18R		-CH= Chrome (available with RSTH24 only)	24= 24 VDC
RSTH19	¹ Choose from lamp selection chart	-BN= Brushed Nickel (available with RSTH19)	120= 120 VAC/VDC
		-PB= Polished Brass (available with RSTH24 only)	

EXAMPLE: RSTH18/M6-WH

With Housing Enclosure Example: LU-GRHR06 (for Insulated Ceiling installation)